

Flood Risk Report

Lincoln County, Maine

Town of Alna, Town of Boothbay, Town of Boothbay Harbor, Town of Bremen, Town of Bristol, Town of Damariscotta, Town of Dresden, Town of Edgecomb, Town of Jefferson, Town of Newcastle, Town of Nobleboro, Town of Somerville, Town of South Bristol, Town of Southport, Town of Waldoboro, Town of Westport Island, Town of Whitefield, Town of Wiscasset, Township of Hibberts Gore, Monhegan Plantation

Report Number 001 4/1/2014 *Final*





Project Area Community List

Community Name
TOWN OF ALNA
TOWN OF BOOTHBAY
TOWN OF BOOTHBAY HARBOR
TOWN OF BREMEN
TOWN OF BRISTOL
TOWN OF DAMARISCOTTA
TOWN OF DRESDEN
TOWN OF EDGECOMB
TOWN OF JEFFERSON
TOWN OF NEWCASTLE
TOWN OF NOBLEBORO
TOWN OF SOMERVILLE
TOWN OF SOUTH BRISTOL
TOWN OF SOUTHPORT
TOWN OF WALDOBORO
TOWN OF WESTPORT ISLAND
TOWN OF WHITEFIELD
TOWN OF WISCASSET
TOWNSHIP OF HIBBERTS GORE
MONHEGAN PLANTATION

Preface

The Department of Homeland Security (DHS), Federal Emergency Management Agency's (FEMA) Risk Mapping, Assessment, and Planning (Risk MAP) program provides states, tribes, and local communities with flood risk information and tools that they can use to increase their resilience to flooding and better protect their citizens. By pairing accurate floodplain maps with risk assessment tools and planning and outreach support, Risk MAP has transformed traditional flood mapping efforts into an integrated process of identifying, assessing, communicating, planning for, and mitigating flood-related risks.

This Flood Risk Report (FRR) provides non-regulatory information to help local or tribal officials, floodplain managers, planners, emergency managers, and others better understand their flood risk, take steps to mitigate those risks, and communicate those risks to their citizens and local businesses.

Because flood risk often extends beyond community limits, the FRR provides flood risk data for the entire Flood Risk Project as well as for each individual community. This also emphasizes that flood risk reduction activities may impact areas beyond jurisdictional boundaries.

Flood risk is always changing, and there may be other studies, reports, or sources of information available that provide more comprehensive information. The FRR is not intended to be regulatory or the final authoritative source of all flood risk data in the project area. Rather, it should be used in conjunction with other data sources to provide a comprehensive picture of flood risk within the project area.

Table of Contents

1	Int	rodu	ction	5
	1.1	Ab	out Flood Risk	5
	1.1	.1	Calculating Flood Risk	5
	1.1	.2	Risk MAP Flood Risk Products	5
	1.2	Use	es of this Report	6
	1.3	Sou	arces of Flood Risk Assessment Data Used	7
	1.4	Rel	ated Resources	8
2	Flo	od R	tisk Analysis	10
	2.1	Ove	erview	10
	2.2	Ana	alysis of Risk	10
	2.2	.1	Flood Depth and Analysis Grids	11
	2.2	.3	Coastal-Specific Datasets	12
	2.2	.4	Estimated Flood Loss Information	12
	2.2	.5	Areas of Mitigation Interest	15
3	Flo	od R	Risk Analysis Results	23
	3.1	Flo	od Risk Map	24
	3.2	Lin	coln County, Maine Flood Risk Project Area Summary	26
	3.2	.1	Overview	26
	3.2	.2	Flood Risk Datasets	27
	3.3	Cor	mmunities	31
	3.3	.1	Town of Alna Summary (CID 230083)	32
	3.3	.2	Town of Boothbay Summary (CID 230212)	35
	3.3	.3	Town of Boothbay Harbor Summary (CID 230213)	38
	3.3	.4	Town of Bremen Summary (CID 230214)	41
	3.3	.5	Town of Bristol Summary (CID 230215)	44
	3.3	.6	Town of Damariscotta Summary (CID 230216)	49
	3.3	.7	Town of Dresden Summary (CID 230084)	52
	3.3	.8	Town of Edgecomb Summary (CID 230217)	55
	3.3	.9	Township of Hibberts Gore Summary (CID 230712)	58
	3.3	.10	Town of Jefferson Summary (CID 230085)	60
	3.3	.11	Monhegan Plantation Summary (CID 230511)	63
	3.3	.12	Town of Newcastle Summary (CID 230218)	65

	3.3.13	Town of Nobleboro Summary (CID 230219)	68
	3.3.14	Town of Somerville Summary (CID 230512)	70
	3.3.15	Town of South Bristol Summary (CID 230220)	73
	3.3.16	Town of Southport Summary (CID 230221)	77
	3.3.17	Town of Waldoboro Summary (CID 230086)	81
	3.3.18	Town of Westport Island Summary (CID 230222)	84
	3.3.19	Town of Whitefield Summary (CID 230087)	88
	3.3.20	Town of Wiscasset Summary (CID 230223)	91
4	Actions	to Reduce Flood Risk	94
	4.1 Typ	bes of Mitigation Actions	94
	4.1.1	Preventative Measures.	94
	4.1.2	Property Protection Measures	94
	4.1.3	Natural Resource Protection Activities	95
	4.1.4	Structural Mitigation Projects	95
	4.1.5	Public Education and Awareness Activities	95
	4.1.6	Emergency Service Measures	96
		ntifying Specific Actions for Your Community	
	4.3 Mit	igation Programs and Assistance	98
	4.3.1	FEMA Mitigation Programs and Assistance	
	4.3.2	Additional Mitigation Programs and Assistance	99
5	Acrony	ms and Definitions	100
	5.1 Acr	onyms	100
	5.2 Def	initions	101
6	Additio	nal Resources	104
7	Data He	ed to Develon Flood Risk Products	106

FLOOD RISK REPORT

1 Introduction

1.1 About Flood Risk

Floods are naturally occurring phenomena that can and do happen almost anywhere. In its most basic form, a flood is an accumulation of water over normally dry areas. Floods become hazardous to people and property when they inundate an area where development has occurred, causing losses. Mild flood losses may have little impact on people or property, such as damage to landscaping or the generation of unwanted debris. Severe flooding can destroy buildings, ruin crops, and cause critical injuries or death.

1.1.1 Calculating Flood Risk

It is not enough to simply identify where flooding may occur. Just because one knows where a flood occurs does not mean they know the **risk** of flooding. The most common method for determining flood risk, also referred to as vulnerability, is to identify the probability of flooding and the consequences of flooding. In other words:

- Flood Risk (or Vulnerability) = Probability x Consequences; where
- **Probability** = the likelihood of occurrence
- Consequences = the estimated impacts associated with the occurrence

The probability of a flood is the likelihood that a flood will occur. The probability of flooding can change based on physical, environmental, and/or contributing engineering factors. Factors affecting the probability that a flood will impact an area range from changing weather patterns to the existence of mitigation projects. The ability to assess the probability of a flood and the level of accuracy for that assessment are also influenced by modeling methodology advancements, better knowledge, and longer periods of record for the water body in question.

The consequences of a flood are the estimated impacts associated with the flood occurrence. Consequences relate to humans activities within an area and how a flood impacts the natural and built environments.

1.1.2 Risk MAP Flood Risk Products

Through Risk MAP, FEMA provides communities with updated Flood Insurance Rate Maps (FIRMs) and Flood Insurance Studies (FISs) that focus on the probability of floods and that show where flooding may occur as well as the calculated 1% annual chance flood elevation. The 1% annual chance flood, also known as the base flood, has a 1% chance



Flooding is a natural part of our world and our communities.
Flooding becomes a significant hazard, however, when it intersects with the built environment.

Which picture below shows more flood risk?





Even if you assume that the flooding in both pictures was the same probability—let's say a 10-percent-annual-chance flood—the consequences in terms of property damage and potential injury as a result of the flood in the bottom picture are much more severe. Therefore, the flood risk in the area shown in the bottom picture is higher.

of being equaled or exceeded in any given year. FEMA understands that flood risk is dynamic—that flooding does not stop at a line on a map—and as such, provides the following flood risk products:

- Flood Risk Report (FRR): The FRR presents key risk analysis data for the Flood Risk Project.
- Flood Risk Map (FRM): Like the example found in Section 3.1 of this
 document, the FRM shows a variety of flood risk information in the
 project area. More information about the data shown on the FRM
 may be found in Section 2 of this report.
- Flood Risk Database (FRD): The FRD is in GIS format and houses the flood risk data developed during the course of the flood risk analysis that can be used and updated by the community. After the Flood Risk Project is complete, this data can be used in many ways to visualize and communicate flood risk within the Flood Risk Project.

These Flood Risk Products provide flood risk information at both the Flood Risk Project level and community level (for those portions of each community within the Flood Risk Project). They demonstrate how decisions made within a Flood Risk Project can impact properties downstream, upstream, or both. Community-level information is particularly useful for mitigation planning and emergency management activities, which often occur at a jurisdictional level.



Whether or not an area might flood is one consideration. The extent to which it might flood adds a necessary dimension to that understanding.

1.2 Uses of this Report

The goal of this report is to help inform and enable communities and tribes to take action to reduce flood risk. Possible users of this report include:

- Local elected officials
- Floodplain managers
- Community planners
- Emergency managers
- Public works officials
- Other special interests (e.g., watershed conservation groups, environmental awareness organizations, etc.)

State, local, and tribal officials can use the summary information provided in this report, in conjunction with the data in the FRD, to:

• **Update local hazard mitigation plans.** As required by the 2000 Federal Stafford Act, local hazard mitigation plans must be updated at least every five (5) years. Summary information presented in Section 3 of this report and the FRM can be used to identify areas that may need additional focus when updating the risk assessment section of a local hazard mitigation plan. Information found in Section 4 pertains to the different mitigation techniques and programs and can be used to inform decisions related to the mitigation strategy of local plans.

- Update community comprehensive plans. Planners can use flood risk information in the development and/or update of comprehensive plans, future land use maps, and zoning regulations. For example, zoning codes may be changed to better provide for appropriate land uses in high-hazard areas.
- Update emergency operations and response plans. Emergency
 managers can identify low-risk areas for potential evacuation and
 sheltering and can help first responders avoid areas of high-depth
 flood water. Risk assessment results may reveal vulnerable areas,
 facilities, and infrastructure for which planning for continuity of
 operations plans (COOP), continuity of government (COG) plans,
 and emergency operations plans (EOP) would be essential.
- Develop hazard mitigation projects. Local officials (e.g., planners and public works officials) can use flood risk information to reevaluate and prioritize mitigation actions in local hazard mitigation plans.
- Communicate flood risk. Local officials can use the information in this report to communicate with property owners, business owners, and other citizens about flood risks, changes since the last FIRM, and areas of mitigation interest. The report layout allows community information to be extracted in a fact sheet format.
- Inform the modification of development standards. Floodplain
 managers, planners, and public works officials can use information
 in this report to support the adjustment of development standards
 for certain locations. For example, structures built in areas with a
 moderate wave hazard could benefit from the same building
 standards as those built in high wave hazard areas.

The Flood Risk Database, Flood Risk Map, and Flood Risk Report are "non-regulatory" products. They are available and intended for community use but are neither mandatory nor tied to the regulatory development and insurance requirements of the National Flood Insurance Program (NFIP). They may be used as regulatory products by communities if authorized by state and local enabling authorities.



Vulnerability of infrastructure is another important consideration.



Buildings with foundations that withstand wave action are more likely to survive coastal flooding.

1.3 Sources of Flood Risk Assessment Data Used

To assess potential community losses, or the consequences portion of the "risk" equation, the following data is typically collected for analysis and inclusion in a Flood Risk Project:

- Information about local assets or resources at risk of flooding
- Information about the physical features and human activities that contribute to that risk
- Information about where the risk is most severe

For most Flood Risk Projects, FEMA uses the following sources of flood risk information to develop this report:

- HAZUS estimated flood loss information
- New engineering analyses (e.g., hydrology and hydraulic modeling) to develop new flood boundaries
- Locally supplied data (see Section 7 for a description)
- Sources identified during the Discovery process


1.4 Related Resources

For a more comprehensive picture of flood risk, FEMA recommends that state and local officials use the information provided in this report in conjunction with other sources of flood risk data, such as those listed below.

- FIRMs and FISs. This information indicates areas with specific flood hazards by identifying the limit and extent of the 1-percent-annual-chance floodplain, the 0.2-percent-annual-chance floodplain, Primary Frontal Dunes, and wave hazards (VE Zones and the Limit of Moderate Wave Action (LIMWA)). FIRMs and FIS Reports do not necessarily identify all floodplains in a Flood Risk Project. The FIS Report includes summary information regarding other frequencies of stillwater (storm surge) flooding. In rural areas and areas for which flood hazard data are not available, the 1-percent-annual-chance floodplain may not be identified.
- HAZUS Flood Loss Estimation Reports. HAZUS can be used to generate reports, maps and tables on potential flood damage that can occur based on new/proposed mitigation projects or future development patterns and practices. HAZUS can also run specialized risk assessments, such as what happens when a dam or levee fails. Flood risk assessment tools are available through other agencies as well, including the National Oceanic and Atmospheric Administration (NOAA) and the U.S. Army Corps of Engineers (USACE). Other existing coastal or watershed reports may have a different focus, such as water quality, but may also contain flood risk and risk assessment information. See Section 6 for additional resources.
- Flood or multi-hazard mitigation plans. Local hazard mitigation
 plans include risk assessments that contain flood risk information
 and mitigation strategies that identify community priorities and
 actions to reduce flood risk. This report was informed by any
 existing mitigation plans in the Flood Risk Project.
- Hurricane Evacuation Studies. Produced through a joint effort by FEMA, NOAA, and USACE,
 Hurricane Evacuation Studies provide tools and information to the state and county emergency
 management offices to help determine who should evacuate during hurricane threats, and when
 those evacuations should occur. The information can be used to supplement or update hurricane
 evacuation plans and operational procedures for responding to hurricane threats.







FEMA data can be leveraged to identify and measure vulnerability by including local building information (i.e. building type). The examples above show various ways to display flooding intersecting with buildings.

- Tsunami Inundation Maps. Maps depicting tsunami inundation hazard zones are produced for coastal areas exposed to tsunami threats, typically those on with Pacific Ocean coasts. The mapping is accomplished through efforts coordinated by FEMA, NOAA, the U.S. Geological Survey (USGS), USACE, and numerous state and local agencies. The maps can be used by communities to supplement or update emergency management and evacuation plans.
- **FEMA Map Service Center (MSC)**. The MSC has useful information, including fly sheets, phone numbers, data, etc. Letters of Map Change are also available through the MSC. The user can view DFIRM databases and the National Flood Hazard Layer (NFHL) Database.

2 Flood Risk Analysis

2.1 Overview

Flood hazard identification uses FIRMs, and FIS Reports to identify where flooding can occur along with the probability and depth of that flooding. Flood risk assessment is the systematic approach to identifying how flooding impacts the environment. In hazard mitigation planning, flood risk assessments serve as the basis for mitigation strategies and actions by defining the hazard and enabling informed decision making. Fully assessing flood risk requires the following:

- Identifying the flooding source and determining the flood hazard occurrence probability
- Developing a complete profile of the flood hazard including historical occurrence and previous impacts
- Inventorying assets located in the identified flood hazard area
- Estimating potential future flood losses caused by exposure to the flood hazard area

Flood risk analyses are different methods used in flood risk assessment to help quantify and communicate flood risk. Coastal flood risk analysis can be performed on a large scale (state, county) level and on a very small scale (parcel, census block). Advantages of large-scale coastal flood risk analysis, especially at county level, include identifying how actions and development in one community can affect surge and wave propagation of adjacent coastal areas. On the parcel or census block level, flood risk analysis can provide actionable data to individual property owners so they can take appropriate mitigation steps.

2.2 Analysis of Risk

The FRR, FRM, and FRD contain a variety of flood risk analysis information to help describe and visualize flood risk within the coastal study area. For Lincoln County, ME this information includes the following elements:

- Flood Depth and Analysis Grids
- Coastal Flood Risk Assessments
- Wave Height Grids
- Areas of Mitigation Interest





Flooding impacts non-populated areas too, such as agricultural lands and wildlife habitats.

State and Local Hazard
Mitigation Plans are required to
have a comprehensive allhazard risk assessment. The
flood risk analyses in the FRR,
FRM, and FRD can inform the
flood hazard portion of a
community's or state's risk
assessment. Further, data in
the FRD can be used to
develop information that meets
the requirements for risk
assessments as it relates to the
hazard of flood in hazard
mitigation plans.

2.2.1 Flood Depth and Analysis Grids

Grids are FEMA datasets provided in the FRD to better describe the risk of the flood hazard. While the FIRM and FIS Report describe "what" is at risk by identifying the hazard areas, water surface, flood depth, and analysis grids can help define "how bad" the risk is within those identified areas. These grids are intended to be used by communities for additional analysis, enhanced visualization, and communication of flood risks for hazard mitigation planning and emergency management. The Flood Depth and Analysis Grids provide an alternative way to visualize how a particular flood characteristic (depth, wave heights, etc.) vary within the floodplain. Since they are derived from the engineering modeling results, they are typically associated with a particular frequency-based flooding event (e.g., 1% annual chance event). Grids provided in the FRD for Lincoln County, ME include the following:


Flood Depth Grid (for the 1% annual chance flood frequency): A
Flood Depth Grid is created during the course of a Flood Risk
Project. These grids communicate flood depth as a function of the
difference between the calculated water surface elevation and the
ground.

Coastal flood depth grids are created for areas where the dominant wave hazard is overland wave propagation. The grid depicts the difference in elevation between the wave crest elevation and the ground. For Lincoln County, ME the depth grid for the 1-percent-annual-chance (base) flood for which overland wave propagation results are produced as a part of the FIS is provided in the FRD.

Depth grids form the basis for refined HAZUS loss estimates (as presented in a table in Section 3 of this report) and are used to calculate potential flood losses for display on the FRM and for tabular presentation in this report. Depth grids may also be used for a variety of ad-hoc risk visualization and mitigation initiatives.



Grid data can make flood mapping more informative. The top image is a flood depth grid showing relative depths of water in a scenario flood event. The bottom image is a percent annual chance of flooding grid, which shows inundation areas of various frequency floods.



Grid data can be used to communicate the variability of floodplains, such as where floodplains are particularly deep or hazardous, where residual risks lie behind levees, and where losses may be great after a flood event. For mitigation planning, grid data can inform the hazard profile and vulnerability analysis (what is at risk for different frequencies) and can be used for preliminary benefit-cost analysis screening. For floodplain management, higher regulatory standards can be developed in higher hazard flood prone areas (i.e., 10-percent-chance floodplains or deep floodplains).

Grid data is stored in the FRD, and a list of available grid data is provided in the FRR. Visualizations of grids (maps) are not provided.

2.2.2 Coastal-Specific Datasets

Unique hazards are present in communities and locations along the coast. Because of the low and mildly sloping topography, some coastal communities may be exposed to large increases in inundated areas from only minor increases in water levels. Certain areas along the coast may also be more vulnerable to storm-induced coastal erosion, depending on the size and condition of coastal dunes. The following datasets provide information that help communicate some of these coastal-specific risks.

 Coastal Wave Height Grid: This dataset represents the controlling wave height for a given flood frequency. It depicts the exposure to the wave hazard component of coastal flooding. This raster reflects the controlling wave height typically computed along transects by the Wave Height Analysis for Flood Insurance Studies (WHAFIS) model for the 1-percent-annual-change (base) flood. Wave impacts are known to be a significant cause of damage to structures in the coastal zone.


2.2.3 Estimated Flood Loss Information


Flood loss estimates provided in the FRR were developed using a FEMA flood loss estimation tool, HAZUS. Originally developed for earthquake risk assessment, HAZUS has evolved into a multi-hazard tool developed and distributed by FEMA that can provide loss estimates for floods, earthquakes, and hurricane winds. HAZUS is a nationally accepted, consistent flood risk assessment tool to assist individuals and communities to create a more accurate picture of flood risk. Some benefits of using HAZUS include the following:

- Outputs that can enhance state and local mitigation plans and help screen for cost-effectiveness in FEMA mitigation grant programs
- Analysis refinement through updating inventory data and integrating data produced using other flood models
- Widely available support documents and networks (HAZUS Users Groups)

Files from the FRD can be imported into HAZUS to develop other risk assessment information including:

- Debris generated after a flood event
- Dollar loss of the agricultural products in a study region
- Utility system damages in the region
- Vehicle loss in the study region
- Damages and functionality of lifelines such as highway and rail bridges, potable water, and wastewater facilities





Coastal-specific flood risk datasets help identify and communicate the hazards that are unique to coastal communities.



HAZUS is a loss estimation methodology developed by FEMA for flood, wind, and earthquake hazards. The methodology and data established by HAZUS can also be used to study other hazards. HAZUS is a loss estimation methodology developed by FEMA for flood, wind, and earthquake hazards. The methodology and data established by HAZUS can also be used to study other hazards.

Scenario-Based Flood Loss Estimates:

Scenario-based flood losses have been calculated using HAZUS for the 10-, 2-, 1-, and 0.2-percent-annual-chance flood events. In this report, these losses are expressed in dollar amounts and are provided for the Flood Risk Project area only.

Loss estimates are based on best available data, and the methodologies applied result in an approximation of risk. These estimates should be used to understand relative risk from flood and potential losses. Uncertainties are inherent in any loss estimation methodology, arising in part from approximations and simplifications that are necessary for a comprehensive analysis (e.g., incomplete inventories, demographics, or economic parameters).

Flood loss estimates are being provided at the project and community levels for multiple flood frequencies including:

- Residential Asset Loss: These include direct building losses (estimated costs to repair or replace
 the damage caused to the building) for all classes of residential structures including single
 family, multi-family, manufactured housing, group housing, and nursing homes. This value also
 includes content losses.
- **Commercial Asset Loss**: These include direct building losses for all classes of commercial buildings including retail, wholesale, repair, professional services, banks, hospitals, entertainment, and parking facilities. This value also includes content and inventory losses.
- Other Asset Loss: This includes losses for facilities categorized as industrial, agricultural, religious, government, and educational. This value also includes content and inventory losses.
- Essential Facility Losses: Essential facilities are defined in HAZUS as facilities which provide
 services to the community and should be functional after a flood, including schools, police
 stations, fire stations, medical facilities, and emergency operation centers. These facilities would
 otherwise be considered critical facilities for mitigation planning purposes. Estimated damages
 (in terms of loss of function) for essential facilities are determined on a site-specific basis
 according to latitude and longitude. For this report, HAZUS calculates the types and numbers of
 essential facilities impacted.
- Infrastructure: For analysis of infrastructure, HAZUS supports the analysis of transportation systems and lifeline utility systems. Transportation systems include highways, railways, light railways, buses, ports and harbors, ferries, and airport systems. Utility systems include potable water systems, wastewater, oil, natural gas, electric power, and communication systems. For this report, HAZUS calculates the types of infrastructure impacted.
- Business Disruption: This includes the losses associated with the inability to operate a business due to the damage sustained during the flood. Losses include inventory, income, rental income, wage, and direct output losses, as well as relocation costs.
- Annualized Losses: Annualized losses are calculated using HAZUS by taking losses from multiple events over different frequencies and expressing the long-term average by year. This factors in historic patterns of frequent smaller floods with infrequent but larger events to provide a balanced presentation of flood damage.

- Loss Ratio: The loss ratio expresses the scenario losses divided by the total building value for a local jurisdiction and can be a gage to determine overall community resilience as a result of a scenario event. For example, a loss ratio of 5 percent for a given scenario would indicate that a local jurisdiction would be more resilient and recover more easily from a given event, versus a loss ratio of 75 percent which would indicate widespread losses. An annualized loss ratio uses the annualized loss data as a basis for computing the ratio. Loss ratios are not computed for business disruption. These data are presented in the FRR.
- HAZUS Flood Risk Value: On the FRM, flood risk is expressed in the following five categories: very low, low, medium, high, and very high for census blocks that have flood risk. It is based on the 1-percent-annual-chance total asset loss by census block.

HAZUS-estimated loss data can be used in many ways to support local decision making and explanation of flood risk. For mitigation planning purposes, loss data can be used to help meet requirements to develop loss information for the hazard of flood. Also, the FRM can show where flood risk varies by geographic location. For emergency management, HAZUS data can help forecast losses based on predicted events, and resources can be assigned accordingly. Loss information can support floodplain management efforts, including those to adopt higher regulatory standards. Also, awareness of exposed essential facilities and infrastructure encourages mitigation actions to protect citizens from service disruption should flooding occur.

HAZUS estimated loss data is summarized in the FRR and on the FRM and stored in the FRD.

2.2.4 Areas of Mitigation Interest

Many factors contribute to flooding and flood losses. Some are natural, and some are not. In response to these risks, there has been a focus by the federal government, state agencies, and local jurisdictions to mitigate properties against the impacts of flood hazards so that future losses and impacts can be reduced. An area identified as an Area of Mitigation Interest (AoMI) is an important element of defining a more comprehensive picture of flood risk and mitigation activity in a watershed, identifying target areas and potential projects for flood hazard mitigation, encouraging local collaboration, and communicating how various mitigation activities can successfully reduce flood risk.


This report and the FRM may include information that focuses on identifying Areas of Mitigation Interest that may be contributing (positively or negatively) to flooding and flood losses in the Flood Risk Project. AoMIs are identified through coordination with local stakeholders; through revised hydrologic and hydraulic and/or coastal analyses; by leveraging other studies or previous flood studies; from community mitigation plans, floodplain management plans, and local surveys; and from the mining of federal government databases (e.g., flood claims, disaster grants, and data from other agencies). Below is a list of the types of Areas of Mitigation Interest that may be identified in this Flood Risk Report, shown on the Flood Risk Map, and stored in the Flood Risk Database:

Dams

A dam is a barrier built across a waterway for impounding water. Dams vary from impoundments that are hundreds of feet tall and contain thousands of acre-feet of water (e.g., Hoover Dam) to small dams that are a few feet high and contain only a few acre-feet of water (e.g., small residential pond). "Dry dams," which are designed to contain water only during floods and do not impound water except for the purposes of flood control, include otherwise dry land behind the dam.

While most modern, large dams are highly engineered structures with components such as impervious cores and emergency spillways, most smaller and older dams are not. State dam safety programs emerged in the 1960s, and the first Federal Guidelines for Dam Safety were not prepared until 1979. By this time, the vast majority of dams in the United States had already been constructed.

and their assigned hazard classification.



amount of water they impound,

Reasons dams are considered AoMIs:

- Many older dams were not built to any particular standard and thus may not withstand extreme rainfall events. Older dams in some parts of the country are made out of an assortment of materials. These structures may not have any capacity to release water and could be overtopped, which could result in catastrophic failure.
- Even dams that follow current dam safety programs may not be regulated, as downstream risk may have changed since the dam was constructed. Years after a dam is built, a house, subdivision, or other development may be constructed in the area downstream of the dam. Thus, a subsequent dam failure could result in damage. Since these



This dam failure caused flooding that damaged several homes and vehicles.

dams are not regulated, it is impossible to predict how safe they are.

- A significant dam failure risk is structural deficiencies associated with older dams that are not being adequately addressed today through needed inspection/maintenance practices.
- For larger dams a flood easement may have been obtained on a property. However, there may have been buildings constructed in violation of the flood easement.
- When a new dam is constructed, the placement of such a large volume of material in a floodplain area (if that is the dam location) will displace flood waters and can alter how the watercourse flows. This can result in flooding upstream, downstream, or both.
- For many dams, the dam failure inundation zone is not known. Not having knowledge of these risk areas could lead to unprotected development in these zones.


Levees and Major Embankments

FEMA defines a levee as "a man-made structure, usually an earthen embankment, designed and constructed in accordance with sound engineering practices to contain, control, or divert the flow of water so as to provide protection from temporary flooding." Levees are sometimes referred to as dikes. Soil used to construct a levee is compacted to make the levee as strong and stable as possible. To protect against erosion and scouring, levees can be covered with everything from grass and gravel to harder surfaces like stone (riprap), asphalt, or concrete.

Similar to dams, levees have not been regulated in terms of safety and design standards until relatively recently. Many older levees were constructed in a variety of ways, from a farmer piling dirt along a stream to prevent nuisance flooding to levees made out of old mining spoil material. As engineered structures, levees are designed to a certain height and can fail if a flood event is greater than anticipated.

A floodwall is a vertical wall that is built to provide protection from a flood in a similar manner as a levee. Typically made of concrete or steel, floodwalls often are erected in urban locations where there is not enough room for a levee. Floodwalls are sometimes constructed on a levee crown to increase the levee's height.

Most new dams and levees are engineered to a certain design standard. If that design is exceeded, they could be overtopped and fail catastrophically, causing more damage than if the levee was not there in the first place. Few levees anywhere in the nation are built to more than a 1-percent-annual-chance flood protection rating,



For more information about the risks associated with living behind levees, consult the publication "So, You Live Behind a Levee!" published by the American Society of Civil Engineers at http://content.asce.org/ASC ELeveeGuide.html.

and the areas behind them are still at some risk for flooding. This threat is called residual risk. In some states, residual risk areas can extend up to 15 miles from a riverbank. Although the probability of flooding may be lower because a levee exists, risk is nonetheless still present. The American Society of Civil Engineers' publication "So, You Live Behind a Levee!" provides an in-depth explanation of levee and residual risk.

Major embankments, on the other hand, are rarely designed with any flood protection level in mind. Railroads, road abutments, and canals—especially in the Western United States—are not considered levees or dams and have issues such as unknown construction materials/methods. These embankments are not regulated from a flood risk standpoint.

Reasons levees and major embankments are considered AoMIs:

- Like dams, many levees in the United States were constructed using unknown techniques and materials.
 These levees have a higher failure rate than those that have been designed to today's standards.
- A levee might not provide the flood risk reduction it once did as a result of flood risk changes over time. Flood risk can change due to a number of factors, including; increased flood levels due to climate change or better estimates of flooding, development in the watershed increasing flood levels and settlement of the levee or floodwall, and sedimentation in the levee channel. Increased flood levels mean decreased flood protection. The lack of adequate maintenance over time will also reduce the capability of a levee to contain the flood levels for which it was originally designed.
- Given enough time, any levee will eventually be overtopped or damaged by a flood that exceeds the levee's capacity.
 Still, a widespread public perception of levees is that they will always provide protection. This perception may lead to not taking mitigation actions such as purchasing flood insurance.
- A levee is a system that can fail due to its weakest point, and therefore maintenance is critical. Many levees in the United States are poorly maintained or not maintained at all. Maintenance also includes maintaining the drainage systems behind the levees so they can keep the protected area dry.





Canal levee breaches as a result of Hurricane Katrina in New Orleans in 2005. Note damages can be more extensive due to high velocity flood flows than if the levee was not there.

Coastal Structures

Coastal structures are used to "harden" the shoreline for a variety of purposes which include:

- Jetties: Structures constructed to direct currents or accommodate vessels.
- Groynes: Protective structures of stone or concrete that extend from shore into the water to prevent a beach from washing away.
- Sea walls: A form of hard and strong coastal defense constructed on the inland part of a coast to reduce the effects of strong waves.
- As the rate of sea level rise accelerates, an increase in coastal erosion is likely. We are now facing rapid sea level changes on a scale of decades. Higher sea levels could affect the coastal zone and accelerate coastal erosion and flooding in a variety of ways, including; greater shoreline retreat; increased coastal erosion rates; property destruction; and saltwater intrusion into bays, rivers, and underground water resources. In addition, a general elevation in the water table due to sea level rise will result.

Reasons coastal structures are considered AoMIs:

- While coastal structures or "hardening of the shoreline" may provide a temporary level of flood reduction for a very specific site, it also interrupts the dynamic processes of the littoral flow (flow along the coastline) which results in accelerated coastal erosion.
- Erosion often occurs along beaches during storms, especially severe storms that stay offshore for days and result in ongoing battering of the shoreline through high wind and waves. As the beach erodes, vulnerable properties are placed at even greater risk to coastal flooding, storm surge, wave heights, wave run up, and coastal erosion.
- Higher water tables associated with sea level rise could lead
 to the failure of septic systems and other drainage systems,
 such as storm drains, which need to be located at a certain
 elevation above the water table. Elevation of the water
 table would also affect the river drainage systems by
 affecting the rate of infiltration and increasing the amount
 of runoff which would, in turn, increase the risk of flooding.

Stream Flow Constrictions

A stream flow constriction occurs when a human-made structure, such as a culvert or bridge, constricts the flow of a river or stream. The results of this constriction can be increased damage potential to the structure, an increase in velocity of flow through the structure,



Severe beach erosion and damage resulting from a nor'easter.

and the creation of significant ponding or backwater upstream of the structure. Regulatory standards regarding the proper opening size for a structure spanning a river or stream are not consistent and may be non-existent. Some local regulations require structures to pass a volume of water that corresponds to a certain size rain event; however, under sizing, these openings can result in flood damage to the structure itself. After a large flood event, it is not uncommon to have numerous bridges and culverts "washed out."

Reasons stream flow constrictions are considered AoMIs:

- Stream flow constrictions can back water up on property upstream of the structure if not designed properly.
- These structures can accelerate the flow through the structure causing downstream erosion if not properly mitigated. This erosion can affect the structure itself, causing undermining and failure.
- If the constriction is a bridge or culvert, it can get washed out causing an area to become isolated and potentially more difficult to evacuate.
- Washed-out culverts and associated debris can wash downstream and cause additional constrictions.

• At-Risk Essential Facilities

Essential facilities, sometimes called "critical facilities," are those whose impairment during a flood could cause significant problems to individuals or communities. For example, when a community's wastewater treatment is flooded and shut down, not only do contaminants escape and flow into the floodwaters, but backflows of sewage can contaminate basements or other areas of the community. Similarly, when a facility such as a hospital is flooded, it can result in a significant hardship on the community not only during the event but long afterwards as well.

Reasons at-risk essential facilities are considered AoMIs:

- Costly and specialized equipment may be damaged and need to be replaced.
- Impairments to facilities such as fire stations may result in lengthy delays in responding and a focus on evacuating the facility itself.
- Critical records and information stored at these facilities may be lost.

Past Flood Insurance Claims and Individual Assistance/Public Assistance Hotspots

Assistance provided after flood events (flood insurance in any event and Individual Assistance [IA] or Public Assistance [PA] after



Clusters of past flood insurance claims can show where there is a repetitive flood problem.

declared disasters) occurs in flood affected areas. Understanding geographically where this assistance is being provided may indicate unique flood problems.

Flood insurance claims are not always equally distributed in a community. Although estimates indicate that 20 to 50 percent of structures in identified flood hazard areas have flood insurance, clusters of past claims may indicate where there is a flood problem. However, clusters of past claims and/or areas where there are high payments under FEMA's IA or PA Programs may indicate areas of significant flood hazard.

Reasons past claim hotspots are considered AoMIs:

- A past claim hotspot may reflect an area of recent construction (large numbers of flood insurance policies as a result of a large number of mortgages) and an area where the as-built construction is not in accordance with local floodplain management regulations.
- Sometimes clusters of past claims occur in subdivisions that were constructed before flood protection standards were in place, places with inadequate stormwater management systems, or in areas that may not have been identified as SFHAs.
- Clusters of IA or PA claims may indicate areas where high flood insurance coverage or other mitigation actions are needed.

Areas of Significant Land Use Change

Development, whether it is a 100-lot subdivision or a single lot big box commercial outlet, can result in large amounts of fill and other material being deposited in flood storage areas, thereby increasing flood hazards downstream.

Additionally, when development occurs, hard surfaces such as parking lots, buildings and driveways do not allow water to absorb into the ground, and more of the rainwater becomes runoff flowing directly into streams. As a result, the "peak flow" in a stream after a storm event will be higher and will occur faster. Without careful planning, major land use changes can affect the impervious area of a site and result in a significant increase in flood risk caused by streams that cannot handle the extra storm water runoff.

Sometimes a major land use change may be for planning purposes only. For example, a land use change that rezones land from a classification such as floodplain that restricts development to a zone such as industrial or high density residential could result in significant new infrastructure and structures in high flood risk areas.





Rooftops, pavements, patios, and driveways contribute to the impervious area in a watershed. This occurs in both urban areas and rural areas being developed.

Reasons Areas of Significant Land Use Change are considered AoMIs:

- Development in areas mapped SFHA reduces flood storage areas, which can make flooding worse at the development site and downstream of it.
- Impervious surfaces speed up the water flowing in the streams, which can increase erosion and the danger that fast-flowing floodwaters pose to people and buildings.
- Rezoning flood-prone areas to high densities and/or higher intensity uses can result in more people and property at risk of flooding and flood damage.

Key Emergency Routes Overtopped During Frequent Flooding Events

Roads are not always elevated above estimated flood levels, and present a significant flood risk to motorists during flooding events. When alternate routes are available, risks may be reduced, including risks to life and economic loss.

Reasons overtopped roads are considered AoMIs:

- Such areas, when identified, can be accounted for and incorporated into Emergency Action Plans.
- Roads may be elevated or reinforced to reduce the risk of overtopping during flood events.

Drainage or Stormwater-Based Flood Hazard Areas, or Areas Not Identified as Floodprone on the FIRM But Known to Be Inundated

Flood hazard areas exist everywhere. While FEMA maps many of these, others are not identified. Many of these areas may be located in communities with existing, older, and often inadequate stormwater management systems or in very rural areas. Other similar areas could be a result of complex or unique drainage characteristics. Even though they are not mapped, awareness of these areas is important so adequate planning and mitigation actions can be performed.

Reasons drainage or stormwater-based flood hazard areas or unidentified floodprone locations are considered AoMIs:

- So further investigation of such areas can occur and, based on scientific data, appropriate mitigation actions can result (i.e., land use and building standards).
- To create viable mitigation project applications in order to reduce flood losses.



When large highways close due to flooding, traffic is detoured causing inconvenience and economic loss.

• Areas of Mitigation Success

Flood mitigation projects are powerful tools to communicate the concepts of mitigation and result in more resilient communities. Multiple agencies have undertaken flood hazard mitigation actions for decades. Both structural measures—those that result in flood control structures—and non-structural measures have been implemented in thousands of communities. An extensive list of mitigation actions can be found in Section 4.

Reasons areas of mitigation success are considered AoMIs:

- Mitigation successes identify those areas within the community that have experienced a reduction or elimination of flood risk.
- Such areas are essential in demonstrating successful loss reduction measures and in educating citizens and officials on available flood hazard mitigation techniques.
- Avoided losses can be calculated and shown.

Areas of Significant Riverine or Coastal Erosion

Stream channels and coastlines are constantly subject to the forces of erosion. Areas of erosion (stream or coastal) threaten infrastructure, general building stock, and businesses, and also pose a threat to human life.

Reasons why areas of significant riverine or coastal erosion are considered AoMIs:

- A community may wish to avoid development in areas identified as subject to erosion hazards.
- Riverine flood damage assessments generally consider inundation alone.
- Landslides and mudslides are a result of erosion.
- Bank erosion caused by within channel flows is not recognized as a significant hazard in Federal floodplain management regulations.
- Riverine and coastal erosion can undercut structures and roads, causing instability and possible collapse.
- Approximately one-third of the nation's streams experience severe erosion problems.

Other

Other types of flood risk areas include drainage or stormwater-based flood hazard areas, or areas known to be inundated during storm events.

3 Flood Risk Analysis Results

The following pages provide summary flood risk results for Lincoln County, Maine as follows:


Flood Risk Map (FRM). Within the Flood Risk Project the FRM displays base data reflecting community boundaries, major roads, and stream lines; potential losses that include both the 2010 Flood Average Annualized Loss (AAL) Study supplemented with new HAZUS runs for areas with new or updated flood modeling; new Flood Risk Project areas; a bar chart summarizing community per capita loss; and graphics and text that promote access and usage of additional data available through the FRD, FIRM, and National Flood Hazard Layer and viewers (desktop or FEMA website, etc.). This information can be used to assist in Flood Risk Project-level planning as well as for developing mitigation actions within each jurisdiction located within the Flood Risk Project.

The FRM provides a graphical overview of the Flood Risk Project which highlights areas of risk that should be noted, based on potential losses, exposed facilities, etc., based on data found in the FRD. Refer to the data in the FRD to conduct additional analyses.

- Flood Risk Project Summary. Within the Flood Risk Project area, summary data for some or all of
 the following datasets are provided for the entire project area and also on a jurisdiction by
 jurisdiction basis:
 - Flood Depth and Analysis Grids. A general discussion of the data provided in the FRD.
 - Flood Risk Assessment Information. A loss estimation of potential flood damages using different flood scenarios.
 - Areas of Mitigation Interest. A description of areas that may require mitigation or additional risk analysis.

3.1 Flood Risk Map

The Flood Risk Map for this Flood Risk Project is shown below. In addition to this reduced version of the map, a full size version is available within the FRD.

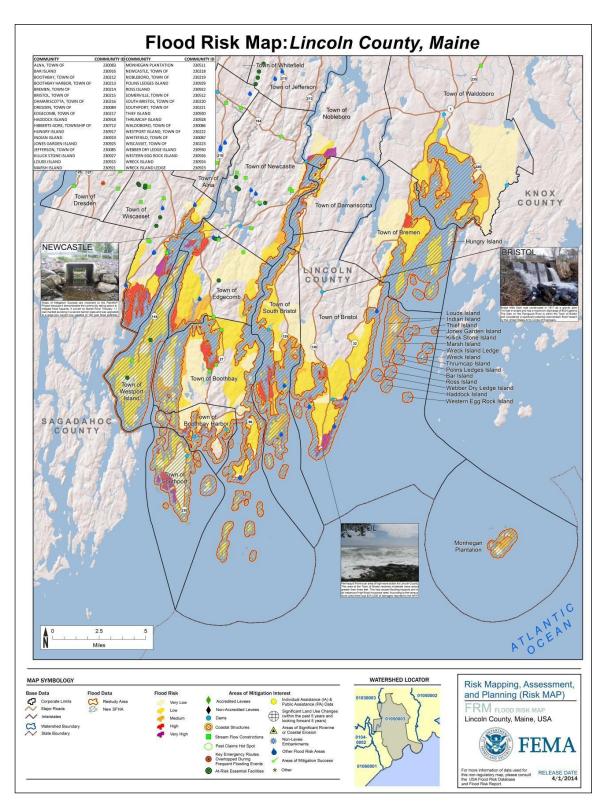

This page left intentionally blank.

3.2 Countywide Study of Lincoln County, ME Flood Risk Project Area Summary

3.2.1 Overview

Lincoln County, Maine is located in the central and southern part of the state and is surrounded by 4 counties; Cumberland County to the southwest, Androscoggin County to the northwest, Kennebec County to the north and Lincoln County to the east. The Atlantic Ocean also borders Lincoln County to the south. The county has a total area of 699 square miles, of which 223 square miles is water. Approximately 525.7 miles of shoreline in Lincoln County were studied by detailed coastal analysis to develop flood hazard parameters. The following communities in Lincoln County, Maine are impacted by the coastal study:

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Alna	230083	675	21.3	Υ	N/A	Υ
Town of Boothbay	230212	2,960	71.7	Υ	N/A	Υ
Town of Boothbay Harbor	230213	2,334	58.5	Υ	N/A	Υ
Town of Bremen	230214	782	27.8	Υ	N/A	Υ
Town of Bristol	230215	2,644	93.1	Υ	N/A	Υ
Town of Damariscotta	230216	2,059	14.7	Υ	N/A	Υ
Town of Dresden	230084	1,625	33.2	Υ	N/A	Υ
Town of Edgecomb	230217	1,090	20.8	Υ	N/A	Υ
Town of Jefferson	230085	2,388	58.5	Υ	N/A	Υ
Town of Newcastle	230218	1,759	32.5	Υ	N/A	Υ
Town of Nobleboro	230219	1,597	23.1	Υ	N/A	Υ
Town of Somerville	230512	509	22.8	Υ	N/A	Υ
Town of South Bristol	230220	897	29.7	Υ	N/A	Υ
Town of Southport	230221	684	23.1	Υ	N/A	Υ
Town of Waldoboro	230086	4,916	78.8	Υ	N/A	Υ
Town of Westport Island	230222	745	14.2	Υ	N/A	Υ
Town of Whitefield	230087	2,273	47.5	N	N/A	Υ
Town of Wiscasset	230223	3,603	27.6	Υ	N/A	Υ
Township of Hibberts Gore	230712	01	0.8	Υ	N/A	Υ
Monhegan Plantation	230511	75	48.5	Υ	N/A	Υ

Community-specific results are provided on subsequent pages. Data provided below and on subsequent pages only includes areas located within the Lincoln County, Maine Flood Risk Project.

Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.2.2 Flood Risk Datasets

As a part of this Flood Risk Project, flood risk datasets were created for inclusion in the Flood Risk Database. Those datasets are summarized for this Flood Risk Project below:

• Flood Depth and Analysis Grids

The FRD contains datasets in the form of wave height grids for the entire Flood Risk Project that can be used for additional analysis, enhanced visualization, and communication of flood risks for hazard mitigation planning and emergency management. The data provided within the FRD should be used to further isolate areas where flood mitigation potential is high and may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some wave action should seriously consider mitigation options for implementation. Section 2 of the FRR provides general information regarding the development of and potential uses for this data.

Flood Risk Results Information

Lincoln County, Maine flood risk analysis incorporates results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were estimated as well as potential loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total Inven	itory	10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$3,538,700,000	73%	\$56,900,000	1%	\$84,900,000	2%	\$102,000,000	2%	\$137,500,000	3%	\$7,000,000	N/A
Commercial Building/Contents	\$844,300,000	17%	\$19,700,000	l N/A L	\$28,700,000	1% 	\$34,100,000	1%	\$46,400,000	1%	\$2,300,000	N/A
Other Building/Contents	\$460,700,000	10%	\$9,100,000	N/A	\$13,100,000	N/A	\$15,400,000	N/A	\$20,200,000	N/A	\$1,000,000	N/A
Total Building/Contents ²	\$4,843,700,000	100%	\$85,800,000	2% 	\$126,800,000	3% 	\$151,500,000	3%	\$204,100,000	4%	\$10,400,000	N/A
Business Disruption ³	N/A	N/A	\$2,200,000	N/A	\$3,300,000	N/A	\$3,700,000	N/A	\$5,100,000	N/A	\$200,000	N/A
TOTAL ⁴	\$4,843,700,000	N/A	\$87,900,000	2% 	\$130,100,000	3%	\$155,300,000	3%	\$209,200,000	4%	\$10,500,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent

Areas of Mitigation Interest

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Areas of Mitigation Success	2	USACE Culverts Geodatabase June 2012
At Risk Essential Facilities	51	USACE Culverts Geodatabase June 2012
Dams	23	Maine Office of Geographic Information Systems
Key Emergency Routes Overtopped	1	USACE Culverts Geodatabase June 2012
Other Flood Risk Areas	8	LOMR Cases (MSC FEMA)
Other Flood Risk Areas	34	USACE Culverts Geodatabase June 2012
Past Claims Hot Spot	1	Discovery Report Mid-Coastal Watershed June 2012
Streamflow Constrictions	43	USACE Culverts Geodatabase June 2012

Areas of Mitigation Interest for Lincoln County are a vital aspect of a RiskMAP project. They help to identify areas that may be affecting flood risk that would benefit from a raised local awareness. These points of Flood Risk Hazards throughout the county come from a variety of sources including Federal, State, Local, Discovery and Resilience.

- The Maine Office of Geographic Information Systems provided the location and information regarding Lincoln County Dams. This dataset provided valuable knowledge about the condition and potential hazards of the structures.
- The United States Army Corps of Engineers provided a detailed hydraulic analysis for all culverts and bridges in the area to obtain estimated flow capacity of these structures. The geodatabase and excel data was used to make assessments on the quality and risk associated with the features for mitigation and planning purposes. Tables and pictures provided insight into how the structure would perform under a series of flood events ranging from the 25-year storm event to the 100-year storm event. A detailed list of the conditions and materials used to construct the bridges and culverts also provided information into their quality and durability.
- Discovery Report Mid-Coastal Watershed from June 2012 provided local community insight into areas of mitigation interest. These are considered highly valuable due to the knowledge from locals that live there on a day to day basis.
- Letters of Map Revision are mitigations from a community level that gives a detailed analysis of the hydrology in that specific case. These are used to determine risk factors from local claims from specific site surveys.

Numerous culverts were identified as areas of mitigation interests within Lincoln County. Culverts noted within the Flood Risk Report meet the general criteria for area of mitigation concern. Culverts taken into mitigation consideration are in need of size increase, general repair, and/or unblocking debris.





S Outlet:

Also taken into consideration for areas of mitigation concern were dams. Dams found within the Flood Risk Report displayed significant potential downstream hazard according to the United States Army Corps of Engineers.

In addition to the countywide and community based summary and for further information regarding Area of Mitigation Interest and their attributes, refer to the AoMI Point Summary in the Flood Risk Geodatabase provided.

3.3 Communities

The following sections provide an overview of the community's floodplain management program as of the date of this publication, as well as summarize the flood risk analysis performed for each project area in Lincoln County, Maine.

3.3.1 Town of Alna Summary (CID 230083)

The following pages include Flood Risk data for the Town of Alna.

3.3.1.1. **Overview**

The hydrographic feature that affects flood risk in Alna is the Sheepscot River. There are 12 Areas of Mitigation Interest of varying types within the Town of Alna.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Alna	230083	675	21.3	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 4 policies totaling approximately \$864,800

Data provided below only includes areas within the Town of Alna that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.1.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate
 these and other areas where flood mitigation potential is high. The FRD includes data which may
 be helpful in planning and implementing mitigation strategies. Properties located in areas
 expected to experience some depth of water should seriously consider mitigation options for
 implementation.

• HAZUS Estimated Loss Information

The Town of Alna's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total In	ventory	10% (10-yr)	2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$54,400,000	82%	\$1,600,000	2%	\$2,300,000	3%	\$2,500,000	4%	\$3,100,000	5%	\$200,000	N/A
Commercial Building/Contents	\$6,100,000	9%	\$100,000	N/A	\$200,000	N/A	\$200,000	N/A	\$400,000	1% 	\$20,000	N/A
Other Building/Contents	\$6,000,000	9%	\$100,000	N/A	\$100,000	N/A	\$200,000	N/A	\$200,000	N/A	\$0	N/A
Total Building/Contents ²	\$66,500,000	100%	\$1,900,000	3% 	\$2,500,000	4% 	\$2,900,000	4%	\$3,700,000	6%	\$200,000	N/A
Business Disruption ³	\$0	N/A	\$40,000	N/A	\$40,000	N/A	\$50,000	N/A	\$60,000	N/A	\$0	N/A
TOTAL ⁴	\$66,500,000	N/A	\$1,900,000	3% 	\$2,600,000	4%	\$2,900,000	4%	\$3,700,000	6%	\$200,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

• Areas of Mitigation Interest

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	2	Maine Office of Geographic Information Systems
Other Flood Risk Areas	5	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	5	USACE Culverts Geodatabase June 2012

- Many Areas of Mitigation Interest were identified for the Town of Alna. The Head Tide Dam located on the Sheepscot River shows significant potential for a hazard to occur downstream. It was built in 1880 and is two miles from the nearest town.
- Another Area of Mitigation Interest is the stream flow constriction on Pinkham Pond, a tributary to Dresden Bog at Bog Road. An increase in culvert size is needed to ease stream flow.
- An additional Area of Mitigation Interest is the stream flow constriction on Trout Brook, a tributary to Sheepscot River at Rabbit Path Road. Increase in culvert sizes are recommended to alleviate stream flow.
- Another culvert noted for a size increase is located on Tributary 7.1 on the Sheepscot River at Cross. Current size of the culvert is causing significant stream flow constrictions.

3.3.2 Town of Boothbay Summary (CID 230212)

The following pages include Flood Risk data for the Town of Boothbay.

3.3.2.1. **Overview**

Hydrographic features that affect flood risk include the Sheepscot River and the Damariscotta River. There are 8 Areas of Mitigation Interest of varying types within the Town of Boothbay.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Boothbay	230212	2,960	76.7	Υ	N/A	Y

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 75 policies totaling approximately \$15,576,600
- NFIP-recognized repetitive loss properties = 2 (1 residential and 1 commercial).

Data provided below only includes areas within the Town of Boothbay that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.2.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Boothbay's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poten	ntial Losses	for Flood	Event Scen	arios		
	Total Inve	entory	10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$371,200,000	75%	\$9,000,000	2%	\$14,200,000	3%	\$16,900,000	3%	\$22,700,000	5%	\$1,200,000	N/A
Commercial Building/Contents	\$71,900,000	14%	\$1,200,000	N/A	\$1,600,000	N/A	\$1,900,000	N/A	\$2,400,000	N/A	\$100,000	N/A
Other Building/Contents	\$53,500,000	11%	\$1,200,000	N/A	\$1,800,000	N/A	\$2,000,000	N/A	\$2,800,000	1%	\$100,000	N/A
Total Building/Contents ²	\$496,500,000	100%	\$11,300,000	2%	\$17,600,000	4%	\$20,800,000	4% 	\$27,800,000	6%	\$1,400,000	N/A
Business Disruption ³	\$0	N/A	\$300,000	N/A	\$400,000	N/A	\$400,000	N/A	\$500,000	N/A	\$20,000	N/A
TOTAL ⁴	\$496,500,000	N/A	\$11,500,000	2%	\$17,900,000	4%	\$21,300,000	4% 	\$28,500,000	6%	\$1,500,000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Areas of Mitigation Success	1	USACE Culverts Geodatabase June 2012
Dams	2	Maine Office of Geographic Information Systems
Other Flood Risk Areas	1	LOMR Cases (MSC FEMA)
Streamflow Constrictions	4	USACE Culverts Geodatabase June 2012

- A number of mitigation interest areas were found for the Town of Boothbay. An increase in size
 for the culvert on Cross River at Adams road would ease water flow. The current size of the
 culvert causes stream flow constrictions.
- An additional culvert causing stream flow constrictions is located on an unknown tributary at Route 27. A culvert size increase will alleviate stream flow.
- Other stream flow constrictions consist of a culvert on an unknown tributary to Cross River at Sherman Cove Road. Culvert size increase is recommended for the easement of water flow on the stream and there is a notable beaver fence possibly causing debris buildup.



 An Area of Mitigation Success is located on Tributary 8.1 (Refer to Digital Insurance Rate Map Study for Lincoln County, Maine); a tributary to Cross River at Adam Pond Road. A new box culvert replaced the old structure in 2007.

3.3.3 Town of Boothbay Harbor Summary (CID 230213)

The following pages include Flood Risk data for the Town of Boothbay Harbor.

3.3.3.1. **Overview**

Hydrographic features that affect flood risk include Boothbay Harbor, Linekin Bay and the Sheepscot River. There are 3 Areas of Mitigation Interest of varying types within the Town of Boothbay Harbor.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Boothbay Harbor	230213	2,334	58.5	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 94 policies totaling approximately \$25,054,500
- NFIP-recognized repetitive loss properties = 1 (0 residential and 1 commercial).

Data provided below only includes areas within the Town of Boothbay Harbor that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.3.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Boothbay Harbor's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poter	ntial Losses	for Flood	Event Scen	arios		
	Total Inve	entory	10% (10-yr)	2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}						
Residential Building/Contents	\$422,700,000	72%	\$6,100,000	1%	\$9,000,000	2%	\$10,900,000	2%	\$14,100,000	2%	\$700,000	N/A
Commercial Building/Contents	\$126,700,000	22%	\$3,900,000	1%	\$5,700,000	1%	\$6,800,000	1%	\$9,100,000	2%	\$500,000	N/A
Other Building/Contents	\$38,400,000	7%	\$1,200,000	N/A	\$1,600,000	N/A	\$1,900,000	N/A	\$2,500,000	N/A	\$100,000	N/A
Total Building/Contents ²	\$587,800,000	100%	\$11,200,000	2%	\$16,400,000	3%	\$19,600,000	3%	\$25,700,000	4%	\$1,400,000	N/A
Business Disruption ³	\$0	N/A	\$400,000	N/A	\$600,000	N/A	\$700,000	N/A	\$900,000	N/A	\$40,000	N/A
TOTAL ⁴	\$587,800,000	N/A	\$11,600,000	2%	\$16,900,000	3%	\$20,300,000	3%	\$26,600,000	5%	\$1,400,000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	2	Maine Office of Geographic Information Systems
Past Claims Hot Spot	1	Discovery Report Mid-Coastal Watershed June 2012

- Only a handful of mitigation interest areas were pinpointed for the Town of Boothbay Harbor.
 The Appalachie Pond Dam, constructed in 1922, is classified as a significant potential
 downstream hazard according to the United States Army Corps of Engineers. It lies one mile
 from the neighboring town of Boothbay.
- Evidence of actual flood losses can be one of the most compelling factors for increasing a community's flood risk awareness. One indicator is repetitive loss claims cited in the Discovery Report Mid-Coastal Watershed June 2012. The area of Atlantic Avenue in the Town of Boothbay Harbor contains one repetitive loss property, inundated by the flooding of Boothbay Harbor.

3.3.4 Town of Bremen Summary (CID 230214)

The following pages include Flood Risk data for the Town of Bremen, including Hungry Island.

3.3.4.1. **Overview**

Hydrographic features that affect flood risk in Bremen include the Medomak River and Muscongus Bay.

Hungry Island is a largely uninhabited privately owned island. Hydrographic features that affect flooding on Hungry Island include the Medomak River and Muscongus Bay.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Bremen	230214	782	27.8	Y	N/A	Y

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 20 policies totaling approximately \$2,645,900

Data provided below only includes areas within the Town of Bremen and Hungry Island, that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.4.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Bremen's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poten	ntial Losses	for Flood	Event Scen	arios		
	Total Inve	entory	10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	l nec Ratin ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$106,100,000	84%	\$1,100,000	1%	\$1,700,000	1%	\$2,000,000	2%	\$2,700,000	2%	\$100,000	N/A
Commercial Building/Contents	\$6,200,000	5%	\$100,000	N/A	\$200,000	N/A	\$200,000	N/A	\$300,000	N/A	\$20,000	N/A
Other Building/Contents	\$14,300,000	11%	\$200,000	N/A	\$300,000	N/A	\$300,000	N/A	\$400,000	N/A	\$30,000	N/A
Total Building/Contents ²	\$126,700,000	100%	\$1,500,000	1%	\$2,200,000	2%	\$2,700,000	2%	\$3,500,000	3%	\$100,000	N/A
Business Disruption ³	\$0	N/A	\$40,000	N/A	\$60,000	N/A	\$70,000	N/A	\$90,000	N/A	\$0	N/A
TOTAL ⁴	\$126,700,000	N/A	\$1.500.000	1%	\$2.300.000	2%	\$2.800.000	2%	\$3.500.000	3%	\$100.000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

3.3.5 Town of Bristol Summary (CID 230215)

The following pages include Flood Risk data for the Town of Bristol, including: Bar Island, Haddock Island, Indian Island, Jones Garden Island, Killick Island, Louds Island, Marsh Island, Polins Ledge Island, Ross Island, Thief Island, Thrumcap Island, Webber Dry Ledge Island, Western Egg Rock Island, Wreck Island, and Wreck Island Ledge.

3.3.5.1. **Overview**

Hydrographic features that affect flood risk include the Damariscotta River, Johns Bay, and the Muscongus Bay. There are 7 Areas of Mitigation Interest of varying types within Bristol.

Bar Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Haddock Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Indian Island is east of Louds Island. It is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Jones Garden Island is primarily composed of stone. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Killick Island is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Louds Island does not host a year round community. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Marsh Island is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Polins Ledge Island is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Ross Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Thief Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Thrumcap Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Webber Dry Ledge Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Western Egg Rock Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Wreck Island is uninhabited and is composed of a mixture of rock and vegetation. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Wreck Island Ledge is uninhabited and is composed primarily of rock. The Town of Bristol is the Island's nearest community. The hydrographic feature that affects flooding is the Muscongus Bay.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Bristol	230215	2,644	93.1	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 69 policies totaling approximately \$19,615,400
- NFIP-recognized repetitive loss properties = 1 (1 residential and 0 commercial).

Data provided below only includes areas within the Town of Bristol and unincorporated areas that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.5.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Town of Bristol's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estim	ated Poter	ntial Losses	for Flood	Event Scenarios					
	Total Inve	entory	10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)			
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}										
Residential Building/Contents	\$360,200,000	77%	\$5,300,000	1%	\$8,100,000	2%	\$9,900,000	3%	\$13,000,000	3%	\$600,000	N/A		
Commercial Building/Contents	\$64,000,000	14%	\$700,000	I N/A I	\$1,000,000	N/A	\$1,100,000	N/A	\$1,400,000	N/A	\$70,000	N/A		
Other Building/Contents	\$43,000,000	9%	\$900,000	N/A	\$1,200,000	N/A	\$1,400,000	N/A	\$1,700,000	N/A	\$100,000	N/A		
Total Building/Contents ²	\$467,200,000	100%	\$6,900,000	1% 	\$10,400,000	2%	\$12,400,000	3%	\$16,000,000	3%	\$900,000	N/A		
Business Disruption ³	\$0	N/A	\$100,000	N/A	\$200,000	N/A	\$200,000	N/A	\$300,000	N/A	\$0	N/A		
TOTAL ⁴	\$467,200,000	N/A	\$7,000,000	1%	\$10,500,000	2%	\$12,600,000	3%	\$16,300,000	3%	\$900,000	N/A		

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	2	Maine Office of Geographic Information Systems
Other Flood Risk Areas	5	LOMR Cases (MSC FEMA)

 A significant area of interest is the Bristol Mills Dam on the Pemaquid River. According to the United States Army Corps of Engineers, the dam has dangerous potential for a downstream hazard. The Bristol Mills Dam was constructed in 1917.

3.3.6 Town of Damariscotta Summary (CID 230216)

The following pages include Flood Risk data for the Town of Damariscotta.

3.3.6.1. **Overview**

The Hydrographic feature that affects flood risk is the Damariscotta River. There is 1 Area of Mitigation Interest within the Town of Damariscotta.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Damariscotta	230216	2,059	14.7	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 10 policies totaling approximately \$1,881,000

Data provided below only includes areas within the Town of Damariscotta that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.6.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Damariscotta's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estim	ated Poter	ntial Losses	for Flood	Event Scen	arios		
	Total Inve	entory	10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}						
Residential Building/Contents	\$183,200,000	52%	\$3,000,000	1%	\$4,600,000	1%	\$5,700,000	2%	\$8,800,000	2%	\$400,000	N/A
Commercial Building/Contents	\$133,900,000	38%	\$4,000,000	1% 	\$6,000,000	2% 	\$7,700,000	2%	\$11,400,000	3%	\$600,000	N/A
Other Building/Contents	\$35,000,000	10%	\$1,000,000	N/A	\$1,600,000	N/A	\$2,000,000	1%	\$3,100,000	1%	\$100,000	N/A
Total Building/Contents ²	\$352,200,000	100%	\$8,000,000	2% 	\$12,100,000	3%	\$15,500,000	4%	\$23,200,000	7%	\$1,000,000	N/A
Business Disruption ³	\$0	N/A	\$300,000	N/A	\$600,000	N/A	\$700,000	N/A	\$1,000,000	N/A	\$20,000	N/A
TOTAL ⁴	\$352,200,000	N/A	\$8,300,000	2% 	\$12,700,000	4%	\$16,200,000	5%	\$24,300,000	7%	\$1,000,000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	1	Maine Office of Geographic Information Systems

3.3.7 Town of Dresden Summary (CID 230084)

The following pages include Flood Risk data for the Town of Dresden.

3.3.7.1. **Overview**

Hydrographic features that affect flood risk include the Kennebec River and the Eastern River. There are 9 Areas of Mitigation Interest of varying types within the Town of Dresden.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Dresden	230084	1,625	33.2	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 6 policies totaling approximately \$1,519,600

Data provided below only includes areas within the Town of Dresden that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.7.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Town of Dresden's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total Inve	entory	10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$112,500,000	82%	\$100,000	N/A	\$300,000	N/A	\$300,000	N/A	\$500,000	N/A	\$10,000	N/A
Commercial Building/Contents	\$12,400,000	9%	\$60,000	N/A	\$70,000	N/A	\$90,000	N/A	\$100,000	N/A	\$0	N/A
Other Building/Contents	\$11,700,000	9%	\$100,000	N/A	\$100,000	N/A	\$100,000	N/A	\$200,000	N/A	\$10,000	N/A
Total Building/Contents ²	\$136,600,000	100%	\$300,000	N/A	\$500,000	N/A	\$600,000	N/A	\$800,000	1%	\$20,000	N/A
Business Disruption ³	\$0	N/A	\$10,000	N/A	\$20,000	N/A	\$20,000	N/A	\$20,000	N/A	\$0	N/A
TOTAL ⁴	\$136,600,000	N/A	\$300,000	N/A	\$500,000	N/A	\$600,000	N/A	\$800,000	1%	\$20,000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	1	Maine Office of Geographic Information Systems
Key Emergency Routes Overtopped	1	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	7	USACE Culverts Geodatabase June 2012

Numerous Areas of Mitigation Interest were classified for the Town of Dresden. A notable area of interest is the stream flow constriction on Nequasset Brook, a tributary to Sasanoa River at Indian Road. The culvert inlet is severely blocked with debris and is located on a high traffic volume road. An increase in culvert size would ease stream flow greatly.



- An additional culvert causing stream flow constrictions is located on the Nequasset Brook, a tributary to Sasanoa River at Indian Road. Increasing culvert size would greatly benefit stream flow.
- A group of culverts causing stream flow constrictions is located on the Nequasset Brook, a tributary to Sasanoa River at Calls Hill Road. For mitigation purposes, a size increase is recommended for all five culverts.
- There are significant stream flow constriction occurrences on the Nequasset Brook, a tributary to Sasanoa River at Orchard Hill. Clearance of debris and an enlargement of culvert sizes are recommended.

3.3.8 Town of Edgecomb Summary (CID 230217)

The following pages include Flood Risk data for the Town of Edgecomb.

3.3.8.1. **Overview**

Hydrographic features that affect flood risk include the Back River, Damariscotta River, and the Sheepscot River. There are 7 Areas of Mitigation Interest of varying types within the Town of Edgecomb.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Edgecomb	230217	1,090	20.8	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 8 policies totaling approximately \$2,730,000

Data provided below only includes areas within the Town of Edgecomb that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.8.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Edgecomb's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total Inve	entory	10% (1	10-yr)	2% (50-yr)		1% (100-yr)		0.2% (5	600-yr)	Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$101,200,000	72%	\$4,800,000	3%	\$6,600,000	5%	\$7,600,000	5%	\$9,200,000	7%	\$600,000	N/A
Commercial Building/Contents	\$19,000,000	14%	\$400,000	N/A	\$600,000	N/A	\$800,000	1%	\$800,000	1%	\$40,000	N/A
Other Building/Contents	\$20,200,000	14%	\$400,000	N/A	\$600,000	N/A	\$600,000	N/A	\$800,000	1%	\$40,000	N/A
Total Building/Contents ²	\$140,400,000	100%	\$5,800,000	4%	\$7,800,000	6%	\$9,000,000	6%	\$10,800,000	8%	\$600,000	N/A
Business Disruption ³	\$0	N/A	\$80,000	N/A	\$100,000	N/A	\$100,000	N/A	\$100,000	N/A	\$0	N/A
TOTAL ⁴	\$140,400,000	N/A	\$5,800,000	4%	\$7,800,000	6%	\$9,000,000	6%	\$11,000,000	8%	\$600,000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	2	USACE Culverts Geodatabase June 2012
Other Flood Risk Areas	3	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	2	USACE Culverts Geodatabase June 2012

- Only a few mitigation interests were recognized for the Town of Edgecomb. A culvert on a tributary to an unknown stream at Old County Road, displays stream flow constriction characteristics. It is recommended for an increase in size.
- Other stream flow constrictions include a culvert on an unknown tributary to Marsh River at Atlantic Avenue. An increase in culvert size is recommended.

3.3.9 Township of Hibberts Gore Summary (CID 230712)

The following pages include Flood Risk data for the Township of Hibberts Gore.

3.3.9.1. **Overview**

The Township of Hibberts Gore is primarily wetlands, part of Sheepscot pond, which is the headwater for the Sheepscot River. The hydrographic feature that affects flooding in Hibberts Gore is the Sheepscot River.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Township of Hibberts Gore	230712	1	0.8	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13

Data provided below only includes areas within the Township of Hibberts Gore that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.9.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Township of Hibberts Gore's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total In	ventory	10% (10-yr)	2% (50-yr)		1% (100-yr)		0.2% (5	600-yr)	Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$2,500,000	22%	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A
Commercial Building/Contents	\$4,600,000	39% 	\$0	l N/A L	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A
Other Building/Contents	\$4,600,000	39%	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A
Total Building/Contents ²	\$11,700,000	100%	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A
Business Disruption ³	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A
TOTAL ⁴	\$11,700,000	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A

^{**}Township of Hibberts Gore is minimally affected by flood risk. Loss assessments are too low to be recorded to the table.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

3.3.10 Town of Jefferson Summary (CID 230085)

The following pages include Flood Risk data for the Town of Jefferson.

3.3.10.1. **Overview**

The hydrographic feature that affects flood risk is Damariscotta Lake. There are 25 Areas of Mitigation Interest of varying types within the Town of Jefferson.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Jefferson	230085	2,388	58.5	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 10 policies totaling approximately \$2,603,000

Data provided below only includes areas within the Town of Jefferson that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.10.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Jefferson's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total Inve	entory	10% (LO-yr)	2% (50-yr)		1% (100-yr)		0.2% (5	600-yr)	Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$243,400,000	83%	\$1,200,000	N/A	\$1,500,000	1%	\$2,100,000	1%	\$3,200,000	1%	\$100,000	N/A
Commercial Building/Contents	\$31,100,000	11%	\$200,000	N/A	\$200,000	N/A	\$300,000	N/A	\$400,000	N/A	\$20,000	N/A
Other Building/Contents	\$20,100,000	7%	\$1,000,000	N/A	\$1,200,000	N/A	\$1,400,000	N/A	\$1,600,000	1%	\$100,000	N/A
Total Building/Contents ²	\$294,600,000	100%	\$2,300,000	1%	\$2,900,000	1%	\$3,800,000	1% 	\$5,100,000	2%	\$200,000	N/A
Business Disruption ³	\$0	N/A	\$70,000	N/A	\$90,000	N/A	\$90,000	N/A	\$100,000	N/A	\$0	N/A
TOTAL ⁴	\$294,600,000	N/A	\$2,400,000	1%	\$3,000,000	1%	\$3,900,000	1% 	\$5,200,000	2%	\$200,000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	13	USACE Culverts Geodatabase June 2012
Dams	2	Maine Office of Geographic Information Systems
Other Flood Risk Areas	7	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	3	USACE Culverts Geodatabase June 2012

- There are several mitigation interests identified for the Town of Jefferson. There is evidence of stream flow constriction on an unknown tributary to Dyer Pond at Atkins Road. It is recommended that both culverts have a size increase.
- An additional area of mitigation interest is the stream flow constriction on an unknown tributary to Brann Brook at State Route 17. There is beaver fencing both at the inlet and upstream of it.
 An increase in culvert size is recommended.
- Yet another set of culverts recommended for enlargement are located on an unknown tributary to Dyer Long Pond at Hinks Road. The poorly stabilized culverts are also at a skewed alignment with the stream. Culvert size increases would ease stream flow constrictions.



The culvert on Tributary 1.1.1, to Ben Brook at Egypt Road is recommended for enlargement.
 Currently, it is marked to be replaced with a 24" by 30' culvert, which is still undersized.

3.3.11 Monhegan Plantation Summary (CID 230511)

The following pages include Flood Risk data for the Monhegan Plantation.

3.3.11.1. **Overview**

Only a handful of residents live on the car-free island of Monhegan Plantation year round. The hydrographic feature that affects flooding is the Gulf of Maine.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Monhegan Plantation	230511	75	48.5	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 5 policies totaling approximately \$1,409,300

Data provided below only includes areas within Monhegan Plantation that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.11.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Monhegan Plantation's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poten	ntial Losses	for Flood	Event Scen	arios		
	Total Inv	Total Inventory		10% (10-yr)		2% (50-yr)		1% (100-yr)		600-yr)	Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$29,100,000	90%	\$400,000	1%	\$600,000	2%	\$800,000	2%	\$1,100,000	3%	\$50,000	N/A
Commercial Building/Contents	\$2,700,000	8%	\$50,000	N/A	\$70,000	N/A	\$80,000	N/A	\$100,000	N/A	\$0	l N/A
Other Building/Contents	\$500,000	2%	\$10,000	N/A	\$10,000	N/A	\$20,000	N/A	\$20,000	N/A	\$0	N/A
Total Building/Contents ²	\$32,300,000	100%	\$500,000	2%	\$700,000	2%	\$900,000	3%	\$1,200,000	4%	\$60,000	N/A
Business Disruption ³	\$0	N/A	\$0	N/A	\$10,000	N/A	\$10,000	N/A	\$10,000	N/A	\$0	N/A
TOTAL ⁴	\$32,300,000	N/A	\$500.000	2%	\$700.000	2%	\$900.000	3%	\$1.200.000	4%	\$60.000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

3.3.12 Town of Newcastle Summary (CID 230218)

The following pages include Flood Risk data for the Town of Newcastle.

3.3.12.1. **Overview**

Hydrographic features that affect flood risk include the Damariscotta River, and Sheepscot River. There are 17 Areas of Mitigation Interest of varying types within the Town of Newcastle.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Newcastle	230218	1,759	23.1	Υ	N/A	Y

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 10 policies totaling approximately \$3,042,800

Data provided below only includes areas within the Town of Newcastle, that area located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.12.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Newcastle's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios											
	Total Inve	Total Inventory		10% (10-yr)		2% (50-yr)		1% (100-yr)		600-yr)	Annualized (\$/yr)				
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}			
Residential Building/Contents	\$158,700,000	59%	\$4,300,000	2%	\$6,400,000	2%	\$7,900,000	3%	\$11,100,000	4%	\$500,000	N/A			
Commercial Building/Contents	\$74,800,000	28%	\$3,100,000	1% 	\$4,100,000	2% 	\$4,800,000	2%	\$6,000,000	2%	\$400,000	N/A			
Other Building/Contents	\$34,200,000	13%	\$800,000	N/A	\$1,000,000	N/A	\$1,200,000	N/A	\$1,400,000	1%	\$90,000	N/A			
Total Building/Contents ²	\$267,700,000	100%	\$8,200,000	3% 	\$11,700,000	4%	\$13,700,000	5%	\$18,600,000	7%	\$1,000,000	N/A			
Business Disruption ³	\$0	N/A	\$200,000	N/A	\$200,000	N/A	\$400,000	N/A	\$400,000	N/A	\$10,000	N/A			
TOTAL⁴	\$267,700,000	N/A	\$8,400,000	3% 	\$12,000,000	4%	\$14,100,000	5%	\$19,000,000	7%	\$1,000,000	N/A			

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Areas of Mitigation Success	1	USACE Culverts Geodatabase June 2012
At Risk Essential Facilities	4	USACE Culverts Geodatabase June 2012
Dams	2	Maine Office of Geographic Information Systems
Other Flood Risk Areas	3	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	7	USACE Culverts Geodatabase June 2012

- A number of mitigation interest areas were found for the Town of Newcastle. An increase in size for the culvert on an unknown tributary to Marsh River at Sheepscot Road would ease stream flow constrictions. The outlet is 75 percent blocked, with water flow exiting through the culverts rusted bottom before reaching the outlet. Also of notable interest, the inlet is rusted and the downstream embankment failed and is eroding.
- An additional culvert recommended for a size increase is located on Marsh River, a tributary to Sheepscot River at Sheepscot Road. A beaver fence is present and an increase in culvert size is recommended to ease stream flow constraints.
- One other area of mitigation interest is the stream flow constriction on an unknown tributary to the Damariscotta River at East Old Country Road. Both culverts found at that location are recommended for an increase in size.
- An Area of Mitigation Success is located on Marsh River Tributary 1.1 (Refer to Digital Rate Insurance Maps at Station Road. A new box culvert has now replaced the old structure.

3.3.13 Town of Nobleboro Summary (CID 230219)

The following pages include Flood Risk data for the Town of Nobleboro.

3.3.13.1. **Overview**

The Town of Nobleboro is a residential community with a sizeable portion of inhabitants that live in the area just for the summer months. Hydrographic features that affect flooding are Damariscotta River and Damariscotta Lake.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Nobleboro	230219	1,597	23.1	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 15 policies totaling approximately \$2,707,000

Data provided below only includes areas within the Town of Nobleboro that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.13.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Nobleboro's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poten	ntial Losses	for Flood	Event Scen	arios		
	Total Inve	Total Inventory		10% (10-yr)		2% (50-yr)		1% (100-yr)		600-yr)	Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	l nec Ratin ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$186,100,000	78%	\$1,500,000	1%	\$1,800,000	1%	\$2,200,000	1%	\$4,200,000	2%	\$200,000	N/A
Commercial Building/Contents	\$30,600,000	13%	\$300,000	N/A	\$300,000	N/A	\$400,000	N/A	\$700,000	N/A	\$30,000	N/A
Other Building/Contents	\$21,100,000	9%	\$70,000	N/A	\$100,000	N/A	\$100,000	N/A	\$200,000	N/A	\$10,000	N/A
Total Building/Contents ²	\$237,800,000	100%	\$1,800,000	1%	\$2,300,000	1%	\$2,700,000	1%	\$5,100,000	2%	\$200,000	N/A
Business Disruption ³	\$0	N/A	\$20,000	N/A	\$30,000	N/A	\$30,000	N/A	\$60,000	N/A	\$0	N/A
TOTAL ⁴	\$237,800,000	N/A	\$1.900.000	1%	\$2.300.000	1%	\$2.700.000	1%	\$5.100.000	2%	\$200.000	N/A

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

3.3.14 Town of Somerville Summary (CID 230512)

The following pages include Flood Risk data for the Town of Somerville.

3.3.14.1. **Overview**

The hydrographic feature that affects flooding in Somerville is the Sheescot River. There are 7 Areas of Mitigation Interest of varying types within the Town of Somerville.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Somerville	230512	509	22.8	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 13 policies totaling approximately \$1,743,800

Data provided below only includes areas within the Town of Somerville that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.14.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Town of Somerville's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios										
	Total In	Total Inventory		10% (10-yr)		2% (50-yr)		1% (100-yr)		600-yr)	Annualized (\$/yr)			
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}		
Residential Building/Contents	\$45,900,000	85%	\$200,000	N/A	\$300,000	1%	\$300,000	1%	\$400,000	1%	\$20,000	N/A		
Commercial Building/Contents	\$2,500,000	5%	\$0	N/A	\$0	l N/A	\$0	N/A	\$0	N/A	\$0	N/A		
Other Building/Contents	\$5,800,000	11%	\$30,000	N/A	\$30,000	N/A	\$40,000	N/A	\$40,000	N/A	\$0	N/A		
Total Building/Contents ²	\$54,200,000	100%	\$200,000	N/A	\$300,000	1%	\$300,000	1%	\$400,000	1%	\$20,000	N/A		
Business Disruption ³	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A	\$0	N/A		
TOTAL ⁴	\$54,200,000	N/A	\$200,000	N/A	\$300,000	1%	\$300,000	1%	\$500,000	1%	\$20,000	N/A		

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	4	USACE Culverts Geodatabase June 2012
Dams	1	Maine Office of Geographic Information Systems
Other Flood Risk Areas	2	USACE Culverts Geodatabase June 2012

- A number of mitigation interests were identified for the Town of Somerville. There is evidence
 of stream flow constriction on Black Brook, a tributary to Travel Brook, at Crummett Mountain
 Road. An increase in culvert size is recommended.
- Another culvert noted for size increase is located on Crummett Brook, a tributary to Black Brook, at Route 105. It has skewed alignment and is recommended to be increased in size to alleviate stream flow constraints.
- An additional Areas of Mitigation Interest is the stream flow constriction on the Lovejoy Stream, a tributary to Turner Pond, at Colby Road. One of the culverts has a slight inlet deformation and both have a skewed alignment. An increase in culvert sizes is recommended to ease stream flow.

3.3.15 Town of South Bristol Summary (CID 230220)

The following pages include Flood Risk data for the Town of South Bristol.

3.3.15.1. **Overview**

Hydrographic features that affect flooding include the Damariscotta River, Johns Bay and Muscongus Bay. There are 3 Areas of Mitigation Interest of varying types within the Town of South Bristol.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of South Bristol	230220	897	29.7	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 26 policies totaling approximately \$6,988,000
- NFIP-recognized repetitive loss properties = 1 (0 residential and 1 commercial).

Data provided below only includes areas within the Town of South Bristol that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.15.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - ➤ Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Town of South Bristol's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poter	ntial Losses	for Flood	Event Scen	arios		
	Total Inventory		10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}								
Residential Building/Contents	\$170,200,000	82%	\$4,900,000	2%	\$7,500,000	4%	\$8,900,000	4%	\$11,600,000	6%	\$600,000	N/A
Commercial Building/Contents	\$23,200,000	11%	\$200,000	N/A	\$300,000	N/A	\$400,000	N/A	\$500,000	N/A	\$10,000	N/A
Other Building/Contents	\$14,900,000	7%	\$300,000	N/A	\$500,000	N/A	\$500,000	N/A	\$600,000	N/A	\$40,000	N/A
Total Building/Contents ²	\$208,300,000	100%	\$5,500,000	3%	\$8,300,000	4%	\$9,800,000	5%	\$12,800,000	6%	\$600,000	N/A
Business Disruption ³	\$0	N/A	\$100,000	N/A	\$100,000	N/A	\$200,000	N/A	\$200,000	N/A	\$0	N/A
TOTAL⁴	\$208,300,000	N/A	\$5,500,000	3%	\$8,300,000	4%	\$10,000,000	5%	\$13,000,000	6%	\$600,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	1	Maine Office of Geographic Information Systems
Other Flood Risk Areas	2	LOMR Cases (MSC FEMA)

3.3.16 Town of Southport Summary (CID 230221)

The following pages include Flood Risk data for the Town of Southport.

3.3.16.1. **Overview**

Hydrographic features that affect flooding include the Sheepscot River and Gulf of Maine. There is 1 Area of Mitigation Interest within the Town of Southport.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Southport	230221	684	23.1	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 41 policies totaling approximately \$11,464,500
- NFIP-recognized repetitive loss properties = 1 (1 residential and 0 commercial).

Data provided below only includes areas within the Town of Southport that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.16.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - ➤ Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Southport's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poter	ntial Losses for Flood Event Scenarios						
	Total Inventory		10% (10-yr)		2% (5	2% (50-yr)		1% (100-yr)		600-yr)	Annualized (\$/yr)		
	Estimated Value	% of Total	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Loccac ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	
Residential Building/Contents	\$168,900,000	92%	\$3,400,000	2%	\$5,900,000	3%	\$7,200,000	4%	\$9,800,000	5%	\$500,000	N/A	
Commercial Building/Contents	\$10,400,000	6%	\$200,000	N/A	\$300,000	N/A	\$400,000	N/A	\$600,000	N/A	\$20,000	N/A	
Other Building/Contents	\$4,600,000	3%	\$30,000	N/A	\$70,000	N/A	\$80,000	N/A	\$100,000	N/A	\$0	N/A	
Total Building/Contents ²	\$183,900,000	100%	\$3,600,000	2%	\$6,300,000	3%	\$7,700,000	4%	\$10,600,000	6%	\$600,000	N/A	
Business Disruption ³	\$0	N/A	\$10,000	N/A	\$30,000	N/A	\$40,000	N/A	\$60,000	N/A	\$0	N/A	
TOTAL ⁴	\$183,900,000	N/A	\$3,600,000	2%	\$6,300,000	3%	\$7,800,000	4%	\$10,600,000	6%	\$600,000	N/A	

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
Dams	1	Maine Office of Geographic Information Systems

 There is one mitigation interest identified for the Town of Southport. The Southport Water Supply Pond Dam, constructed in 1935, shows significant potential downstream hazard according to the United States Army Corps of Engineers. It is approximately just shy of one mile from Decker's Cove.

3.3.17 Town of Waldoboro Summary (CID 230086)

The following pages include Flood Risk data for the Town of Waldoboro.

3.3.17.1. **Overview**

Hydrographic features that affect flooding include the Medomak River and Muscongus Bay. There are 8 Areas of Mitigation Interest of varying types within the Town of Waldoboro.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Waldoboro	230086	4,916	78.8	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 6 policies totaling approximately \$1,443,900

Data provided below only includes areas within the Town of Waldoboro that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.17.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Waldoboro's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estim	Event Scen	narios					
	Total Inventory		10% (10-yr)		2% (50-yr)		1% (100-yr)		0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}								
Residential Building/Contents	\$341,500,000	69%	\$3,700,000	1%	\$5,100,000	1%	\$5,900,000	1%	\$7,900,000	2%	\$400,000	N/A
Commercial Building/Contents	\$90,200,000	18%	\$2,800,000	1%	\$3,800,000	1% 	\$4,500,000	1%	\$6,200,000	1%	\$300,000	N/A
Other Building/Contents	\$63,300,000	13%	\$900,000	N/A	\$1,200,000	N/A	\$1,600,000	N/A	\$2,100,000	N/A	\$90,000	N/A
Total Building/Contents ²	\$495,000,000	100%	\$7,300,000	1%	\$10,100,000	2%	\$11,800,000	2%	\$16,300,000	3%	\$800,000	N/A
Business Disruption ³	\$0	N/A	\$200,000	N/A	\$300,000	N/A	\$300,000	N/A	\$500,000	N/A	\$10,000	N/A
TOTAL ⁴	\$495,000,000	N/A	\$7,500,000	2%	\$10,400,000	2%	\$12,200,000	2%	\$16,800,000	3%	\$800,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	3	USACE Culverts Geodatabase June 2012
Dams	1	Maine Office of Geographic Information Systems
Other Flood Risk Areas	1	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	3	USACE Culverts Geodatabase June 2012

- Several mitigation interests were identified for the Town of Waldoboro. An increase in size for the culvert on Alford Brook, a tributary to Levensaler Brook at Ellard Mank Road would ease stream flow constrictions. It is 75 percent blocked at the inlet with a beaver fence and two lobster traps in front of the fence.
- Another area of mitigation interest is the stream flow constriction on the Levensaler Brook,
 Tributary 1; a tributary to Levensaler Brook at State Route 235. It is recommended to increase the size of both of these culverts to ease water flow constraints.

3.3.18 Town of Westport Island Summary (CID 230222)

The following pages include Flood Risk data for the Town of Westport Island.

3.3.18.1. **Overview**

Hydrographic features that affect flooding include the Sasanoa River, Sheepscot River, Hockomock Bay and the Montsweag Bay. There are 3 Areas of Mitigation Interest of varying types within the Town of Westport Island.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Westport Island	230222	748	14.2	Υ	N/A	Y

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 3 policies totaling approximately \$35,000

Data provided below only includes areas within the Town of Westport Island that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.18.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

• HAZUS Estimated Loss Information

The Town of Westport Island's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

					Estima	ated Poter	ntial Losses	for Flood	Event Scen	arios		
	Total Inventory		10% (10% (10-yr)		2% (50-yr)		1% (100-yr)		600-yr)	Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}								
Residential Building/Contents	\$88,200,000	84%	\$2,600,000	2%	\$3,900,000	4%	\$4,600,000	4%	\$6,000,000	6%	\$300,000	N/A
Commercial Building/Contents	\$9,400,000	9% 	\$400,000	N/A	\$500,000	N/A	\$500,000	N/A	\$600,000	1%	\$30,000	N/A
Other Building/Contents	\$7,000,000	7%	\$200,000	N/A	\$400,000	N/A	\$400,000	N/A	\$600,000	1%	\$20,000	N/A
Total Building/Contents ²	\$104,600,000	100%	\$3,200,000	3%	\$4,600,000	4%	\$5,500,000	5%	\$7,200,000	7%	\$400,000	N/A
Business Disruption ³	\$0	N/A	\$50,000	N/A	\$90,000	N/A	\$100,000	N/A	\$100,000	N/A	\$0	N/A
TOTAL⁴	\$104,600,000	N/A	\$3,200,000	3%	\$4,800,000	5%	\$5,600,000	5%	\$7,400,000	7%	\$400,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how
they are defined for this analysis, and potential mitigation actions that could be considered for
each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	2	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	1	USACE Culverts Geodatabase June 2012

Few mitigation interests were found for the Town of Westport Island. An increase in size for the
culvert on Squam Creek, a tributary to Sheepscot River at Post Office Drive would ease stream
flow constrictions. Due to poor inlet conditions, water runs between a slip lined culvert and an
old cement culvert. The slip lined culvert ends about 10 feet from the outlet. For mitigation
purposes, increasing culvert size is recommended.

3.3.19 Town of Whitefield Summary (CID 230087)

The following pages include Flood Risk data for the Town of Whitefield.

3.3.19.1. **Overview**

The hydrographic feature that affects flooding in Whitefield is the Sheepscot River. There are 31 Areas of Mitigation Interest of varying types within the Town of Whitefield.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Whitefield	230087	2,273	47.5	Ν	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13

Data provided below only includes areas within the Town of Whitefield that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.19.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate
 these and other areas where flood mitigation potential is high. The FRD includes data which may
 be helpful in planning and implementing mitigation strategies. Properties located in areas
 expected to experience some depth of water should seriously consider mitigation options for
 implementation.

HAZUS Estimated Loss Information

The Town of Whitefield's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total Inve	entory	10% (10-yr)	2% (5	60-yr)	1% (10	00-yr)	0.2% (5	600-yr)	Annualiz	ed (\$/yr)
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$155,200,000	83%	\$1,800,000	1%	\$2,100,000	1%	\$2,300,000	1%	\$2,800,000	1%	\$200,000	N/A
Commercial Building/Contents	\$17,300,000	9% 	\$100,000	N/A	\$200,000	N/A	\$200,000	N/A	\$200,000	N/A	\$10,000	N/A
Other Building/Contents	\$14,700,000	8%	\$300,000	N/A	\$300,000	N/A	\$300,000	N/A	\$400,000	N/A	\$30,000	N/A
Total Building/Contents ²	\$187,200,000	100%	\$2,200,000	1%	\$2,600,000	1%	\$2,800,000	1%	\$3,300,000	2%	\$200,000	N/A
Business Disruption ³	\$0	N/A	\$60,000	N/A	\$80,000	N/A	\$80,000	N/A	\$90,000	N/A	\$10,000	N/A
TOTAL ⁴	\$187,200,000	N/A	\$2,200,000	1%	\$2,600,000	1%	\$2,900,000	2%	\$3,400,000	2%	\$200,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	16	USACE Culverts Geodatabase June 2012
Dams	2	Maine Office of Geographic Information Systems
Other Flood Risk Areas	8	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	5	USACE Culverts Geodatabase June 2012

- Many areas of mitigation interest were identified for the Town of Whitefield. There is evidence
 of stream flow constriction on an unknown tributary to Clary Lake at Cookson Road. Therefore,
 an increase in both culvert sizes is recommended.
- Another culvert recommended for size increase is located on East Branch Eastern River, a tributary to Eastern River at Cooper Road. There is high traffic volume and known beaver activity for the area. Increasing culvert size would help alleviate stream flow constraints.
- An additional Area of Mitigation Interest is the stream flow constriction on East Branch Eastern River, a tributary to Eastern River at Gorman Road. An increase in culvert size is recommended for two out of the three culverts located in this area. Also of note, the box culvert is collapsed at the inlet of a dilapidated embankment.
- Yet another culvert recommended for a size increase is located on an unknown tributary to Sheepscot River at Jewett Road. It has a slightly deformed inlet, and the current size of the culvert is causing significant stream flow constrictions.

3.3.20 Town of Wiscasset Summary (CID 230223)

The following pages include Flood Risk data for the Town of Wiscasset.

3.3.20.1. **Overview**

The hydrographic feature that affects flooding in Wiscasset is the Sheepscot River. There are 18 Areas of Mitigation Interest of varying types within the Town of Wiscasset.

Community Name	CID	Total Community Population	Total Community Land Area (sq mi)	NFIP	CRS Rating	Mitigation Plan
Town of Wiscasset	230223	3,603	27.6	Υ	N/A	Υ

- Participating in the Hazard Mitigation Plan For Lincoln County, Maine, expires on 1/1/2017.
- Past Federal Disaster Declarations for flooding = 13
- National Flood Insurance Program (NFIP) policy coverage (policies/values) = 4 policies totaling approximately \$1,078,000

Data provided below only includes areas within the Town of Wiscasset that are located within Lincoln County, Maine and do not necessarily represent community-wide totals. Section 2 of the Flood Risk Report (FRR) provides more information regarding the source and methodology used to develop the information presented below. Datasets used toward the generation of results of this project are described in Section 7 of the FRR and are found in the Flood Risk Database (FRD).

3.3.20.2. Community Analyses and Results

Results for each of the Flood Risk Datasets developed for this Flood Risk Project are summarized below:

• Flood Depth and Analysis Grids

- See the FRD for the following depth and analysis grid data (Section 2 of the FRR provides general information regarding the development of and potential uses for this data):
 - Wave Height Grids (1-percent-annual-chance flood events)
- Additional information and data layers provided within the FRD should be used to further isolate these and other areas where flood mitigation potential is high. The FRD includes data which may be helpful in planning and implementing mitigation strategies. Properties located in areas expected to experience some depth of water should seriously consider mitigation options for implementation.

HAZUS Estimated Loss Information

The Town of Wiscasset's flood risk analysis uses results from a FEMA-performed HAZUS analysis which accounts for newly modeled areas in the Flood Risk Project and newly modeled depths for certain flood events. Potential losses were compared with locally provided tax data to estimate loss ratios for multiple scenarios. Additional information and data layers provided within the FRD should be used to further analyze potential losses and areas where they are likely to occur.

				Estimated Potential Losses for Flood Event Scenarios								
	Total Inve	entory	10% (10-yr)	2% (5	60-yr)	1% (10	00-yr)	0.2% (500-yr)		Annualized (\$/yr)	
	Estimated Value	% of Total	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}	Dollar Losses ⁵	Loss Ratio ^{1,6}
Residential Building/Contents	\$237,500,000	61%	\$2,000,000	1%	\$3,100,000	1%	\$3,600,000	1%	\$5,500,000	1%	\$200,000	N/A
Commercial Building/Contents	\$107,500,000	27%	\$1,800,000	N/A	\$3,500,000	1% 	\$3,900,000	1%	\$5,000,000	1% 	\$200,000	N/A
Other Building/Contents	\$47,500,000	12%	\$600,000	N/A	\$1,000,000	N/A	\$1,300,000	N/A	\$1,600,000	N/A	\$70,000	N/A
Total Building/Contents ²	\$392,500,000	100%	\$4,400,000	1%	\$7,500,000	2% 	\$8,800,000	2%	\$12,000,000	3% 	\$500,000	N/A
Business Disruption ³	\$0	N/A	\$200,000	N/A	\$300,000	N/A	\$300,000	N/A	\$400,000	N/A	\$0	N/A
TOTAL ⁴	\$392,500,000	N/A	\$4,500,000	1%	\$7,900,000	2%	\$9,000,000	2%	\$12,400,000	3%	\$500,000	N/A

Source: HAZUS analysis results stored as the Flood Risk Assessment Dataset in the Flood Risk Database.

¹Loss ratio = Dollar Losses / Estimated Value

²Total Building/Contents Loss = Residential Building/Contents Loss + Commercial Building/Contents Loss + Other Building/Contents Loss.

³Business Disruption = Inventory Loss + Relocation Cost + Income Loss + Rental Income Loss + Wage Loss + Direct Output Loss.

⁴Total Loss = Total Building/Contents + Business Disruption

⁵Losses shown are rounded to nearest \$10,000 for values under \$100,000 and to the nearest \$100,000 for values over \$100,000.

⁶Loss Ratios rounded to nearest integer percent.

 Section 2.2.4 of the FRR provides more information regarding Areas of Mitigation Interest, how they are defined for this analysis, and potential mitigation actions that could be considered for each type. The table below summarizes the number of Areas of Mitigation Interest by type.

Type of Mitigation Interest	Number of Areas	Data Source
At Risk Essential Facilities	6	USACE Culverts Geodatabase June 2012
Dams	1	Maine Office of Geographic Information Systems
Other Flood Risk Areas	5	USACE Culverts Geodatabase June 2012
Streamflow Constrictions	6	USACE Culverts Geodatabase June 2012

- A number of mitigation interests were identified for the Town of Wiscasset. There is evidence of stream flow constriction from Gardiner Pond, a tributary to Dresden Bog at Gardiner Road. This location is in a high traffic volume area with a slightly deformed inlet. Steep embankments and beaver fencing are also present. Culvert size increase is recommended.
- An additional Area of Mitigation Interest is the stream flow constriction on Ward Brook, a tributary to the Sheepscot River, at Bradford Drive. An increase in the larger of the two culverts at this location is recommended to ease stream flow constraint.
- Another Area of Mitigation Interest is the stream flow constriction on the Montsweag Brook, a tributary to the Back River, at Old Dresden Rd. An increase in culvert size is recommended to alleviate stream flow.

4 Actions to Reduce Flood Risk

In order to fully leverage the Flood Risk Datasets and Products created for this Flood Risk Project, local stakeholders should consider many different flood risk mitigation tactics, including, but not limited the items shown in the sub-sections below.

4.1 Types of Mitigation Actions

Mitigation provides a critical foundation on which to reduce loss of life and property by avoiding or lessening the impact of hazard events. This creates safer communities and facilitates resiliency by enabling communities to return to normal function as quickly as possible after a hazard event. Once a community understands its flood risk, it is in a better position to identify potential mitigation actions that can reduce the risk to its people and property.

The mitigation plan requirements in 44 CFR Part 201 encourage communities to understand their vulnerability to hazards and take actions to minimize vulnerability and promote resilience. Flood mitigation actions generally fall into the following categories:

4.1.1 Preventative Measures

Preventative measures are intended to keep flood hazards from getting worse. They can reduce future vulnerability to flooding, especially in areas where development has not yet occurred or where capital improvements have not been substantial. Examples include:

- Comprehensive land use planning
- Zoning regulations
- Subdivision regulations
- Open space preservation
- Building codes
- Floodplain development regulations
- Stormwater management
- Purchase development rights or conservation easements
- Participation in the NFIP Community Rating System (CRS)

4.1.2 Property Protection Measures

Property protection measures protect existing buildings by modifying the building to withstand floods, or by removing buildings from hazardous locations. Examples include:

Building relocation

Before Mitigation and After Mitigation





Communities will need to prioritize projects as part of the planning process. FEMA can then help route federal mitigation dollars to fund these projects.

NFIP's CRS is a voluntary incentive program that recognizes and encourages community floodplain management activities that exceed the minimum NFIP requirements. As a result, flood insurance premium rates are discounted to reflect the reduced flood risk resulting from community actions meeting the three goals of the CRS: to reduce flood losses, to facilitate accurate insurance rating, and to promote the awareness of flood insurance.

For CRS participating communities, flood insurance premium rates are discounted in increments of 5%; i.e., a Class 1 community would receive a 45% premium discount, while a Class 9 community would receive a 5% discount. (A Class 10 is not participating in the CRS and receives no discount.)

- Acquisition and clearance
- Building elevation
- Barrier installation
- Building retrofit

4.1.3 Natural Resource Protection Activities

Natural resource protection activities reduce the impact of floods by preserving or restoring natural areas such as floodplains, wetlands, and dunes and their natural functions. Examples include:

- Wetland protection
- Habitat protection
- Erosion and sedimentation control
- Best management practices (BMP)
- Prevention of stream dumping activities (anti-litter campaigns)
- Improved forestry practices such as reforesting or selective timbering (extraction)

4.1.4 Structural Mitigation Projects

Structural mitigation projects lessen the impact of floods by modifying the environmental natural progression of the flooding event. Structural protection such as upgrading dams/levees for already existing development and critical facilities may be a realistic alternative. However, citizens should be made aware of their residual risk. Examples include:

- Reservoirs, retention, and detention basins
- Levees and floodwalls
- Channel modifications
- Channel maintenance

4.1.5 Public Education and Awareness Activities

Public education and awareness activities advise residents, business owners, potential property buyers, and visitors about floods, hazardous areas, and mitigation techniques they can use to reduce the flood risk to themselves and their property. Examples include:

- Readily available and readable updated maps
- Outreach projects
- Libraries
- Technical assistance

- Real estate disclosure
- Environmental education
- Risk information via the nightly news

4.1.6 Emergency Service Measures

Although not typically considered a mitigation technique, emergency service measures minimize the impact of flooding on people and property. These are actions commonly taken immediately prior to, during, or in response to a hazard event. Examples include:

- Hazard warning system
- Emergency response plan
- COOP and COG planning
- Critical facilities protection
- Health and safety maintenance
- Post flood recovery planning

In Section 3, specific AoMIs were identified. Table 4.1 below identifies possible mitigation actions for each AoMI to consider.

Table 4-1. Mitigation Actions for Areas of Mitigation Interest

AoMI	Possible Actions to Reduce Flood Risk
Dams	Engineering assessment Dam upgrades and strengthening Emergency Action Plan Dam removal Easement creation in impoundment and downstream inundation areas
Levees (accredited and non-accredited) and significant levee-like structures	Generally same as dams above Purchase of flood insurance for at-risk structures
Coastal Structures Jetties Groynes Seawalls Other structures	Increase coastal setbacks for construction Habitat restoration programs Wetland restoration and mitigation banking programs
Stream Flow Pinch Point Undersized culverts or bridge openings	Engineering analysis Replacement of structure pre- and post-disaster
Past Claims and IA/PA Hot Spots	Acquisition Elevation Relocation Floodproofing

For more information regarding hazard mitigation techniques, best practices, and potential grant funding sources, visit www.fema.gov or contact your local floodplain manager, emergency manager, or State Hazard Mitigation Officer.

AoMI	Possible Actions to Reduce Flood Risk
Major Land Use	Higher regulatory standard
or next 5 years)	Transfer of Development rights
Key Emergency Routes Overtopped During Frequent Flooding Events	Elevation Creation of alternate routes Design as low water crossing
Areas of Significant Riverine or Coastal Erosion	Relocation of buildings and infrastructure Regulations and planning Natural vegetation Hardening
Drainage or Stormwater- Based Flood Hazard Areas, or Areas Not Identified as Floodprone on the FIRM But Known to be Inundated	Identification of all flood hazard areas
Areas of Mitigation Success	N/A

4.2 Identifying Specific Actions for Your Community

As many mitigation actions are possible to lessen the impact of floods, how can a community decide which ones are appropriate to implement? There are many ways to identify specific actions most appropriate for a community. Some factors to consider may include the following:

- **Site characteristics.** Does the site present unique challenges (e.g., significant slopes or erosion potential)?
- **Flood characteristics.** Are the flood waters affecting the site fast or slow moving? Is there debris associated with the flow? How deep is the flooding?
- **Social acceptance.** Will the mitigation action be acceptable to the public? Does it cause social or cultural problems?
- **Technical feasibility.** Is the mitigation action technically feasible (e.g., making a building watertight to a reasonable depth)?
- Administrative feasibility. Is there administrative capability to implement the mitigation action?
- Legal. Does the mitigation action meet all applicable codes, regulations, and laws? Public officials may have a legal responsibility to act and inform citizens if a known hazard has been identified.
- Economic. Is the mitigation action affordable? Is it eligible under grant or other funding programs? Can it be completed within existing budgets?

Refer to FEMA Mitigation Planning
How To Guide #3 (FEMA 386-3)
"Developing the Mitigation Plan Identifying Mitigation Actions and
Implementation Strategies" for more
information on how to identify
specific mitigation actions to
address hazard risk in your
community.

FEMA in collaboration with the American Planning Association has released the publication, "Integrating Hazard Mitigation into Local Planning." This guide explains how hazard mitigation can be incorporated into several different types of local planning programs. For more information go to www.planning.org. or http://www.fema.gov/library.

 Environmental. Does the mitigation action cause adverse impacts on the environment or can they be mitigated? Is it the most appropriate action among the possible alternatives?

Your local Hazard Mitigation Plan is a valuable place to identify and prioritize possible mitigation actions. The plan includes a mitigation strategy with mitigation actions that were developed through a public and open process. You can then add to or modify those actions based on what is learned during the course of the Risk MAP project and the information provided within this FRR.

4.3 Mitigation Programs and Assistance

Not all mitigation activities require funding (e.g., local policy actions such as strengthening a flood damage prevention ordinance), and those that do are not limited to outside funding sources (e.g., inclusion in local capital improvements plan, etc.). For those mitigation actions that require assistance through funding or technical expertise, several state and federal agencies have flood hazard mitigation grant programs and offer technical assistance. These programs may be funded at different levels over time or may be activated under special circumstances such as after a presidential disaster declaration.



Communities can link hazard mitigation plans and actions to the right FEMA grant programs to fund flood risk reduction. More information about FEMA HMA programs can be found at http://www.fema.gov/government/grant/hma/index.shtm.

4.3.1 FEMA Mitigation Programs and Assistance

FEMA awards many mitigation grants each year to states and communities to undertake mitigation projects to prevent future loss of life and property resulting from hazard impacts, including flooding. The FEMA Hazard Mitigation Assistance (HMA) programs provide grants for mitigation through the programs listed in Table 4.2 below.

Table 4-2. FEMA Hazard Mitigation Assistance Programs

Mitigation Grant Program	Authorization	Purpose
Hazard Mitigation Grant Program (HMGP)	Robert T. Stafford Disaster Relief and Emergency Assistance Act	Activated after a presidential disaster declaration; provides funds on a sliding scale formula based on a percentage of the total federal assistance for a disaster for long-term mitigation measures to reduce vulnerability to natural hazards
Flood Mitigation Assistance (FMA)	National Flood Insurance Reform Act	Reduce or eliminate claims against the NFIP
Pre-Disaster Mitigation (PDM)	Disaster Mitigation Act	National competitive program focused on mitigation project and planning activities that address multiple natural hazards
Repetitive Flood Claims (RFC)	Bunning-Bereuter- Blumenauer Flood Insurance Reform Act	Reduce flood claims against the NFIP through flood mitigation; properties must be currently NFIP insured and have had at least one NFIP claim

Mitigation Grant Program	Authorization	Purpose
Severe Repetitive Loss (SRL)	Bunning-Bereuter- Blumenauer Flood Insurance Reform Act	Reduce or eliminate the long-term risk of flood damage to SRL residential structures currently insured under the NFIP

The HMGP and PDM programs offer funding for mitigation planning and project activities that address multiple natural hazard events. The FMA, RFC, and SRL programs focus funding efforts on reducing claims against the NFIP. Funding under the HMA programs is subject to availability of annual appropriations, and HMGP funding is also subject to the amount of FEMA disaster recovery assistance provided under a presidential major disaster declaration.

FEMA's HMA grants are awarded to eligible states, tribes, and territories (applicant) that, in turn, provide subgrants to local governments and communities (subapplicant). The applicant selects and prioritizes subapplications developed and submitted to them by subapplicants and submits them to FEMA for funding consideration. Prospective subapplicants should consult the office designated as their applicant for further information regarding specific program and application requirements. Contact information for the FEMA Regional Offices and State Hazard Mitigation Officers (SHMO) is available on the FEMA website (www.fema.gov).

4.3.2 Additional Mitigation Programs and Assistance

Several additional agencies including USACE, Natural Resource Conservation Service (NRCS), U.S. Geological Survey (USGS), and others have specialists on staff and can offer further information on flood hazard mitigation. The State NFIP Coordinator and SHMO are state-level sources of information and assistance, which vary among different states.

The Silver Jackets program, active in several states, is a partnership of USACE, FEMA, and state agencies. The Silver Jackets program provides a state-based strategy for an interagency approach to planning and implementing measures for risk reduction.

5 Acronyms and Definitions

5.1 Acronyms

Α

AAL Average Annualized Loss
ALR Annualized Loss Ratio
AoMI Areas of Mitigation Interest

В

BCA Benefit-Cost Analysis
BFE Base Flood Elevation

BMP Best Management Practices

C

CFR Code of Federal Regulations
COG Continuity of Government Plan
COOP Continuity of Operations Plan
CRS Community Rating System
CSLF Changes Since Last FIRM

D

DHS Department of Homeland Security
DMA 2000 Disaster Mitigation Act of 2000

E

EOP Emergency Operations Plan

F

FEMA Federal Emergency Management Agency

FIRM Flood Insurance Rate Map
FIS Flood Insurance Study
FMA Flood Mitigation Assistance

FRD Flood Risk Database FRM Flood Risk Map FRR Flood Risk Report

FY Fiscal Year

G

GIS Geographic Information System

Н

HMA Hazard Mitigation Assistance HMGP Hazard Mitigation Grant Program

IA Individual Assistance

N

NFIA National Flood Insurance Act
NFIP National Flood Insurance Program
NRCS Natural Resource Conservation Service

P

PA Public Assistance
PDM Pre-Disaster Mitigation

R

RFC Repetitive Flood Claims

Risk MAP Mapping, Assessment, and Planning

S

SFHA Special Flood Hazard Area
SHMO State Hazard Mitigation Officer

SRL Severe Repetitive Loss

U

USACE U.S. Army Corps of Engineers

USGS U.S. Geological Survey

5.2 Definitions

0.2-percent-annual-chance flood – The flood elevation that has a 0.2-percent chance of being equaled or exceeded each year. Sometimes referred to as the 500-year flood.

1-percent-annual-chance flood – The flood elevation that has a 1-percent chance of being equaled or exceeded each year. Sometimes referred to as the 100-year flood.

Annualized Loss Ratio (ALR) – Expresses the annualized loss as a fraction of the value of the local inventory (total value/annualized loss).

Average Annualized Loss (AAL) – The estimated long-term weighted average value of losses to property in any single year in a specified geographic area.

Base Flood Elevation (BFE) – Elevation of the 1-percent-annual-chance flood. This elevation is the basis of the insurance and floodplain management requirements of the NFIP.

Berm – A small levee, typically built from earth.

Cfs – Cubic feet per second, the unit by which discharges are measured (a cubic foot of water is about 7.5 gallons).

Consequence (of flood) – The estimated damages associated with a given flood occurrence.

Crest – The peak stage or elevation reached or expected to be reached by the floodwaters of a specific flood at a given location.

Dam – An artificial barrier that has the ability to impound water, wastewater, or any liquid-borne material, for the purpose of storage or control of water.

Design flood event – The greater of the following two flood events: (1) the base flood, affecting those areas identified as SFHAs on a community's FIRM; or (2) the flood corresponding to the area designated as a flood hazard area on a community's flood hazard map or otherwise legally designated.

Erosion – Process by which floodwaters lower the ground surface in an area by removing upper layers of soil.

Essential facilities – Facilities that, if damaged, would present an immediate threat to life, public health, and safety. As categorized in HAZUS, essential facilities include hospitals, emergency operations centers, police stations, fire stations, and schools.

Flood – A general and temporary condition of partial or complete inundation of normally dry land areas from (1) the overflow of inland or tidal waters or (2) the unusual and rapid accumulation or runoff of surface waters from any source.

Flood Insurance Rate Map (FIRM) – An official map of a community, on which FEMA has delineated both the SFHAs and the risk premium zones applicable to the community. See also Digital Flood Insurance Rate Map.

Flood Insurance Study (FIS) Report – Contains an examination, evaluation, and determination of the flood hazards of a community, and if appropriate, the corresponding water-surface elevations.

Flood risk – Probability multiplied by consequence; the degree of probability that a loss or injury may occur as a result of flooding. Sometimes referred to as flood vulnerability.

Flood vulnerability – Probability multiplied by consequence; the degree of probability that a loss or injury may occur as a result of flooding. Sometimes referred to as flood risk.

Floodborne debris impact – Floodwater moving at a moderate or high velocity can carry floodborne debris that can impact buildings and damage walls and foundations.

Floodwall – A long, narrow concrete or masonry wall built to protect land from flooding.

Floodway (regulatory) – The channel of a river or other watercourse and that portion of the adjacent floodplain that must remain unobstructed to permit passage of the base flood without cumulatively increasing the water surface elevation more than a designated height (usually 1 foot).

Floodway fringe – The portion of the SFHA that is outside of the floodway.

Freeboard – A factor of safety usually expressed in feet above a flood level for purposes of flood plain management. "Freeboard" tends to compensate for the many unknown factors that could contribute to flood heights greater than the height calculated for a selected size flood and floodway conditions, such as wave action, bridge openings, and the hydrological effect of urbanization of the watershed (44CFR§59.1).

HAZUS – A GIS-based risk assessment methodology and software application created by FEMA and the National Institute of Building Sciences for analyzing potential losses from floods, hurricane winds and storm surge, and earthquakes.

High velocity flow – Typically comprised of floodwaters moving faster than 5 feet per second.

Levee – A human-made structure, usually an earthen embankment, designed and constructed in accordance with sound engineering practices to contain, control, or divert the flow of water so as to provide protection from temporary flooding. (44CFR§59.1)

Loss ratio – Expresses loss as a fraction of the value of the local inventory (total value/loss).

Mudflow – Mudslide (i.e., mudflow) describes a condition where there is a river, flow or inundation of liquid mud down a hillside usually as a result of a dual condition of loss of brush cover, and the subsequent accumulation of water on the ground preceded by a period of unusually heavy or sustained rain. A mudslide (i.e., mudflow) may occur as a distinct phenomenon while a landslide is in progress, and will be recognized as such by the Administrator only if the mudflow, and not the landslide, is the proximate cause of damage that occurs. (44CFR§59.1)

Probability (of flood) – The likelihood that a flood will occur in a given area.

Risk MAP – Risk Mapping, Assessment, and Planning, a FEMA strategy to work collaboratively with state, local, and tribal entities to deliver quality flood data that increases public awareness and leads to action that reduces risk to life and property.

Riverine – Of or produced by a river. Riverine floodplains have readily identifiable channels.

Special Flood Hazard Area (SFHA) – Portion of the floodplain subject to inundation by the 1-percentannual or base flood.

Stafford Act – Robert T. Stafford Disaster Relief and Emergency Assistance Act, PL 100-707, signed into law November 23, 1988; amended the Disaster Relief Act of 1974, PL 93-288. This Act constitutes the statutory authority for most federal disaster response activities especially as they pertain to FEMA and FEMA programs.

Stillwater – Projected elevation that flood waters would assume, referenced to National Geodetic Vertical Datum of 1929, North American Vertical Datum of 1988, or other datum, in the absence of waves resulting from wind or seismic effects.

Stream Flow Constrictions – A point where a human-made structure constricts the flow of a river or stream.

6 Additional Resources

ASCE 7 – National design standard issued by the American Society of Civil Engineers (ASCE), *Minimum Design Loads for Buildings and Other Structures*, which gives current requirements for dead, live, soil, flood, wind, snow, rain, ice, and earthquake loads, and their combinations, suitable for inclusion in building codes and other documents.

ASCE 24-05 – National design standard issued by the ASCE, *Flood Resistant Design and Construction*, which outlines the requirements for flood resistant design and construction of structures in flood hazard areas.

National Flood Insurance Program (NFIP), Federal Emergency Management Agency (FEMA), www.floodsmart.gov

FEMA, www.fema.gov

ASCE, 2010. So, You Live Behind a Levee! Reston, VA.

FEMA Publications – available at www.fema.gov

FEMA, 1985. Manufactured Home Installation in Flood Hazard Areas, FEMA 85. Washington, DC, September 1985.

FEMA and the American Red Cross, 1992. *Repairing Your Flooded Home*, FEMA 234/ARC 4476. Washington, DC, August 1992.

FEMA, 1996. Addressing Your Community's Flood Problems, FEMA 309. Washington, DC, June 1996.

FEMA, 1998. Homeowner's Guide to Retrofitting, FEMA 312. Washington, DC, June 1998.

FEMA, 1999. *Protecting Building Utilities from Flood Damage*, FEMA 348. Washington, DC, November 1999.

FEMA, 1999. Riverine Erosion Hazard Areas Mapping Feasibility Study. Washington, DC, September 1999

FEMA, 2003. Interim Guidance for State and Local Officials - Increased Cost of Compliance Coverage, FEMA 301. Washington, DC, September 2003.

FEMA, 2000. Above the Flood: Elevating Your Floodprone House, FEMA 347. Washington, DC, May 2000.

FEMA, 2001. *Understanding Your Risks: Identifying Hazards and Estimating Losses*, FEMA 386-2. Washington, DC, August 2001.

FEMA, 2002a. *Getting Started: Building Support for Mitigation Planning*, FEMA 386-1. Washington, DC, September 2002.

FEMA, 2002b. *Integrating Manmade Hazards into Mitigation Planning*, FEMA 386-7. Washington, DC, September 2002.

FEMA, 2003a. *Developing the Mitigation Plan: Identifying Mitigation Actions and Implementing Strategies*, FEMA 386-3. Washington, DC, April 2003.

FEMA, 2003b. *Bringing the Plan to Life: Implementing the Hazard Mitigation Plan*, FEMA 386-4. Washington, DC, August 2003.

FEMA, 2004a. *Design Guide for Improving School Safety in Earthquakes, Floods, and High Winds*, FEMA 424. Washington, DC, January 2004.

FEMA, 2004b. Federal Guidelines for Dam Safety: Emergency Action Planning for Dam Owners, FEMA 64. Washington, DC, April 2004.

FEMA, 2005. *Integrating Historic Property and Cultural Resource Considerations into Hazard Mitigation Planning*, FEMA 386-6. Washington, DC, May 2005.

FEMA, 2006a. Multi-Jurisdictional Mitigation Planning, FEMA 386-8. Washington, DC, August 2006.

FEMA, 2006b. *Using the Hazard Mitigation Plan to Prepare Successful Mitigation Projects*, FEMA 386-9. Washington, DC, August 2008.

FEMA, 2006c. "Designing for Flood Levels Above the BFE," Hurricane Katrina Recovery Advisory 8, Hurricane Katrina in the Gulf Coast: Building Performance Observations, Recommendations, and Technical Guidance, FEMA 549, Appendix E. Washington, DC, July 2006.

FEMA, 2007a. *Property Acquisition Handbook for Local Communities*, FEMA 317. Washington, DC, September 2007.

FEMA, 2007b. Public Assistance Guide, FEMA 322. Washington, DC, June 2007.

FEMA, 2007c. *Using Benefit-Cost Review in Mitigation Planning*, FEMA 386-5. Washington, DC, May 2007.

FEMA, 2007d. *Design Guide for Improving Critical Facility Safety from Flooding and High Winds: Providing Protection to People and Buildings*, FEMA 543. Washington, DC, January 2007.

FEMA, 2007e. *Selecting Appropriate Mitigation Measures for Floodprone Structures*, FEMA 551. Washington, DC, March 2007.

FEMA, 2007f. Design Guide for Improving Hospital Safety in Earthquakes, Floods, and High Winds: Providing Protection to People and Buildings, FEMA 577. Washington, DC, June 2007.

FEMA, 2008. Reducing Flood Losses Through the International Codes: Meeting the Requirements of the National Flood Insurance Program, FEMA 9-0372, Third Edition. Washington, DC, December 2007.

7 Data Used to Develop Flood Risk Products

GIS base map information was acquired from the following sources:

- United States Federal Emergency Management Agency (FEMA)
- United States CENSUS BUREAU
- United States Geological Survey (USGS)
- United States Army Corps of Engineers (USACE)
- State of Maine, Office of Information Technology (MEGIS)

Special Flood Hazard Areas, Transportation, and Political Areas used in this project were selected from the FEMA Preliminary Database 2/7/2014. Average Annualized Loss information was taken from the FEMA 2010 national AAL HAZUS dataset. Census block data originated from the 2000 census as published by the US Census Bureau. Critical facility locations came from the MEGIS website.

FEMA LOMCs, Repetitive Loss, Mitigation Plan and AoMI information were acquired from the Mid-Coastal Watershed, HUC 01050003 Sagadahoc, Lincoln, Knox, and Waldo Counties Maine Discovery Report June 2012. Culvert and bridge information was derived from the USACE MidCoast Public Road Crossings point data (2012/06/15) with links to excel spreadsheets documenting culvert structure conditions. Dam structures are from the MEGIS impounds dataset published 2006/04/04.

2013 Aerial Photography was provided by MEGIS. Topographic data originated from the USGS LiDAR for the North East (ARRA LIDAR Task Order) USGS Contract: G10PC00026 Task Order Number: G10PD02143 Lots 1 and 2.